




本體		銷子		彈簧	防塵環
材質	處理	材質	處理	材質	材質
鋼	染黑	鋼	硬化、染黑	SUS	NBR
SUS303	-	SUS303	-		

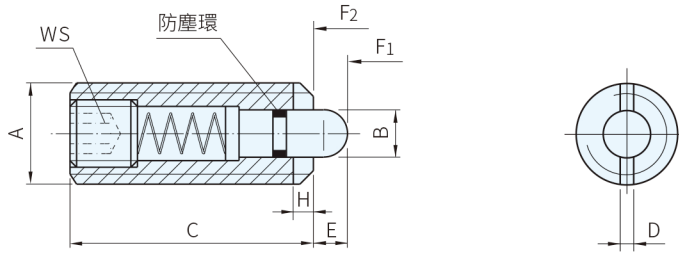


品號	備註	A	B	C	D	E	H	WS	荷重(N)		質量(g)	適用專用扳手	庫存
									F1 ≈	F2 ≈			
22060.0048	鋼 (輕荷重)	M8×1.25	3.8	26	1.5	3.0	1.4	2.5	9	24	6.9	22060.0908	•
22060.0050		M10×1.5	4.0	28	1.5	3.5	1.4	3.0	15	30	11.0	22060.0910	•
22060.0052		M12×1.75	6.0	35	2.7	4.0	2.0	4.0	24	50	20.0	22060.0912	•
22060.0056		M16×2	7.5	40	3.2	5.0	2.5	5.0	36	58	43.0	22060.0916	•
22060.0448	不銹鋼 (輕荷重)	M8×1.25	3.8	26	1.5	3.0	1.4	2.5	9	24	7.2	22060.0908	•
22060.0450		M10×1.5	4.0	28	1.5	3.5	1.4	3.0	15	30	12.0	22060.0910	•
22060.0452		M12×1.75	6.0	35	2.7	4.0	2.0	4.0	24	50	20.0	22060.0912	•
22060.0456		M16×2	7.5	40	3.2	5.0	2.5	5.0	36	58	44.0	22060.0916	•
22060.0148	鋼 (重荷重)	M8×1.25	3.8	26	1.5	3.0	1.4	2.5	17	39	6.6	22060.0908	•
22060.0150		M10×1.5	4.0	28	1.5	3.5	1.4	3.0	22	43	12.0	22060.0910	•
22060.0152		M12×1.75	6.0	35	2.7	4.0	2.0	4.0	40	80	20.0	22060.0912	•
22060.0156		M16×2	7.5	40	3.2	5.0	2.5	5.0	44	113	45.0	22060.0916	•

**Wa. 注意**

- 專用扳手請參閱本單元
- 使用溫度-30°C~+80°C
- 1N = 0.101972kgf
- 輕荷重定位珠牙部無雷射線



- 重荷重定位珠牙部有兩條雷射線

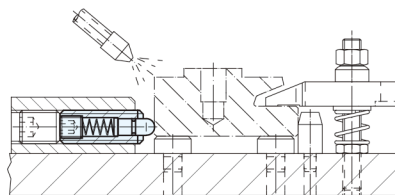**Ex. 使用例**
 訂貨：  交期：  

22060.0048

**Sp. 特長**

- 內有防塵環可避免塵埃及油污長期累積時卡住銷子