




本體 材質	銷子 材質	彈簧 材質
SUS305	SUS303 POM	SUS

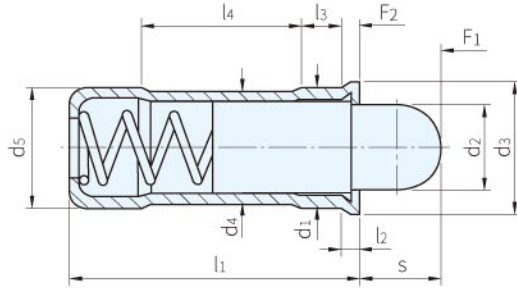

品號	備註	d ₁ +0.1 +0.04	d ₂	d ₃	d ₄	d ₅ ±0.04	l ₁	l ₂ ≈	l ₃ ≈	l ₄ ≈	s	°C		荷重(N)		質量 (g)	庫存	
												min.	max.	F ₁ ≈	F ₂ ≈			
22080.0104	不銹鋼銷子	4	2.8	4.6	3.85	4	10.7	0.9	1.8	5.6	2.7	-	250	3.0	8.2	0.7	•	
22080.0105		5	3.8	5.6	4.85	5	12.0		2.1	6.0	4.0			3.3	9.0	1.2	•	
22080.0106		6	4.8	6.5	5.85	6	15.0		1.0	2.3	8.2			5.5	6.1	12.0	2.2	•
22080.0108		8	6.2	8.5	7.55	8	18.0		1.1	2.9	9.5			6.5	9.0	20.1	4.2	•
22080.0110		10	8.1	11.0	9.55	10	26.0		1.5	4.2	14.3			8.0	16.2	29.0	9.0	•
22080.0124	POM銷子	4	2.8	4.6	3.85	4	10.7	0.9	1.8	5.6	2.7	-30	50	3.0	8.2	0.5	•	
22080.0125		5	3.8	5.6	4.85	5	12.0		2.1	6.0	4.0			3.3	9.0	0.8	•	
22080.0126		6	4.8	6.5	5.85	6	15.0		1.0	2.3	8.2			5.5	6.1	12.0	1.3	•
22080.0128		8	6.2	8.5	7.55	8	18.0		1.1	2.9	9.5			6.5	9.0	20.1	2.5	•
22080.0130		10	8.1	11.0	9.55	10	26.0		1.5	4.2	14.3			8.0	16.2	29.0	5.0	•

Wa) 注意

- ・配合定位珠外徑d₁的工件加工孔徑
建議是H7公差

 訂貨： 交期： 天

22080.0104

Ex) 使用例