




TYPE	外殼		磁鐵 材質	耐熱溫度
	材質	處理		
HF	鋼	鍍鋅	鐵氧磁鐵	200°C
SC	鋼	鍍鋅	鈦磁鐵	200°C
ND	鋼	鍍鋅	釹磁鐵	80°C

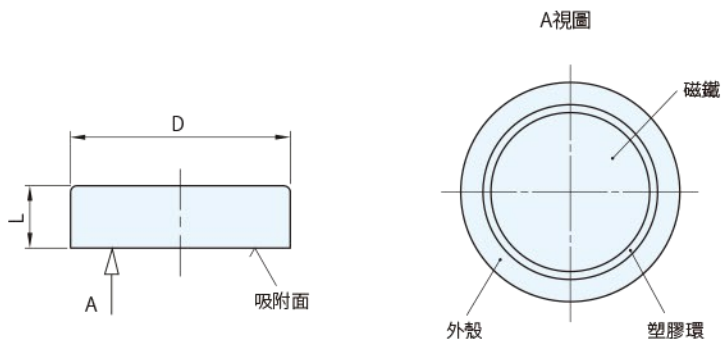

品號	TYPE	D		L		吸附力 (N)	質量 (g)	庫存
RMA-0010	HF	10	+0.1 -0.1	4.5	+0.2 -0.1	4	2	•
RMA-0012		13		4.5		10	3	•
RMA-0014		16		4.5		18	5	•
RMA-0016		20		6		30	10	•
RMA-0018		25		7		40	18	•
RMA-0020		32		7		80	29	•
RMA-0022		40	+0.2 -0.1	8	+0.4 -0.1	125	55	△
RMA-0024		50	10	220	102	△		
RMA-0026		63	+0.3 -0.1	14	350	226	△	
RMA-0028		80	+0.5 -0.1	18	600	468	△	
RMA-0030		100		22	900	915	△	
RMA-0032		125		26	1300	1680	△	
RMA-0034		6		+0.1 -0.1	4.5	+0.1 -0.1	5	1
RMA-0036		8	4.5		11		2	•
RMA-0038	10	4.5	20		3		•	
RMA-0040	13	4.5	40		4		•	
RMA-0042	16	4.5	60		7		•	
RMA-0044	20	6	90		14		•	
RMA-0046	25	7	150		26		•	
RMA-0048	32	7	220		42		•	
RMA-0050	ND	6	+0.1 -0.1	4.5	+0.1 -0.1	5	1	•
RMA-0052		8		4.5		13	2	•
RMA-0054		10		4.5		25	2.5	•
RMA-0056		13		4.5		60	4	•
RMA-0058		16		4.5		95	6	•
RMA-0060		20		6		140	14	•
RMA-0062		25		7		200	25	•
RMA-0064		32		7		350	41	•

SP 特長

• 利用膠水或螺絲固定之

Wa 注意

• 吸附力為單一磁鐵的測定值(參考值)

訂貨： 交期： 天 •
RMA-0010 天 △