


RoHS SUS



TYPE	外殼		磁鐵 材質	耐熱溫度
	材質	處理		
HF	鋼	鍍鋅	鐵氧磁鐵	200°C
HF-SST	SUS	-	-	80°C

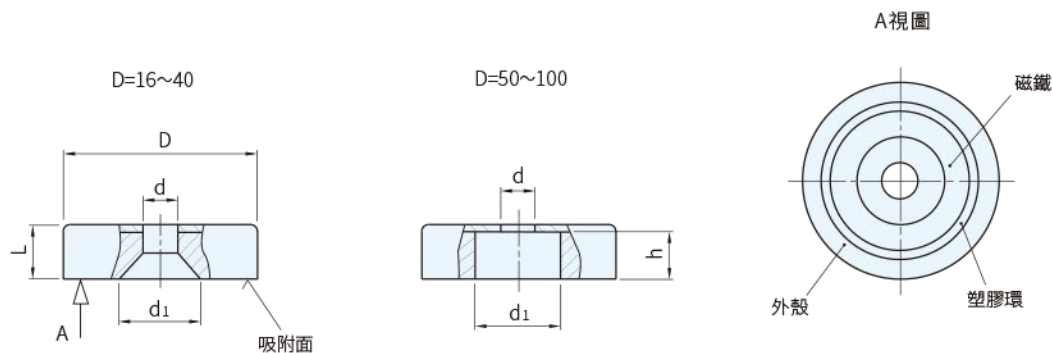

品號	TYPE	D		L		d	d ₁	h	吸附力 (N)	質量 (g)	庫存
RMD-0010	HF	16	+0.1 -0.1	4.5	+0.2 -0.1	3.5	7.5	-	14	4	•
RMD-0012		20		6	+0.3 -0.2	4.1	10.5		27	9	•
RMD-0014		25		7	+0.3 -0.1	5.5	12		36	17	•
RMD-0016		32		7	+0.4 -0.1	5.5	12		72	27	•
RMD-0018		40		8	+0.3 -0.1	5.5	13.5		90	52	△
RMD-0020		50	+0.2 -0.1	10	+0.5 -0.1	8.5	22	8.5	180	84	△
RMD-0022		63	+0.3 -0.1	14		6.5	24	12	290	197	△
RMD-0024		80	+0.5 -0.1	18		6.5	11.5	15	540	458	△
RMD-0026		100	+0.5 -0.1	22		10.5	34	18	680	815	△
RMD-0028		HF-SST	20	+0.1 -0.1		6	+0.2 -0.1	4.1	10	-	22
RMD-0030	25		7		+0.3 -0.2	5.5	11.5	29	17		•
RMD-0032	32		7		+0.4 -0.2	5.5	11.5	58	27		•
RMD-0034	40		8		+0.5 -0.2	5.5	11.5	72	52		△
RMD-0036	50		+0.2 -0.1	10	8.5	22	8.5	145	85	△	
RMD-0038	63		+0.3 -0.1	14	+0.5 -0.2	6.5	24	12	230	195	△

Wa 注意

• 吸附力為單一磁鐵的測定值(參考值)

訂貨： 交期： 天 •

RMD-0010

天 △

Sp 特長

- 不銹鋼的導磁性較鋼材低，因此吸附力也較低
- 避免使用帶磁性的螺絲，以確保磁性不受損