

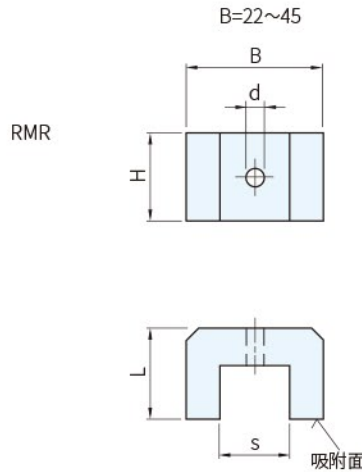

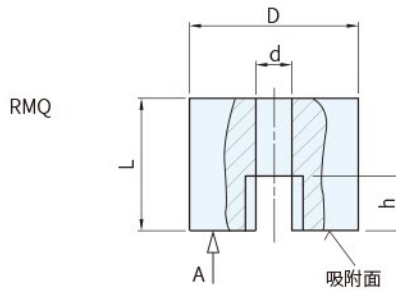

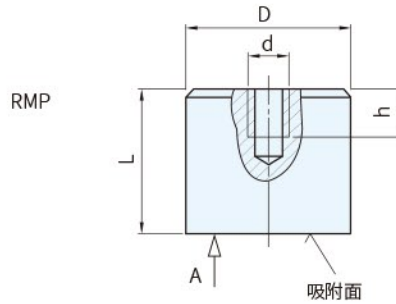



RoHS



B=57~79



TYPE	外殼		磁鐵 材質	耐熱溫度
	材質	處理		
RMP	鋼	紅漆	鋁鎳鈷	磁鐵450°C 紅漆180°C
RMQ	鋼	紅漆	鋁鎳鈷	磁鐵280°C 紅漆180°C
RMR	鋼	紅漆	鋁鎳鈷	磁鐵350°C 紅漆180°C

品號	D	L	d	h	吸附力 (N)	質量 (g)	庫存
RMP-0010	12.5	16	M 4	7	20	15	•
RMP-0012	17	16	M 6	5	26	29	•
RMP-0014	21	19		7	40	42	•
RMP-0016	27	25		9	65	89	•
RMP-0018	35	30		9	150	190	•

品號	D	L	d	d ₁ max.φ螺絲頭	h	s	吸附力 (N)	質量 (g)	庫存
RMQ-0010	13	10	4.2	7	4.5	2	7	6	·
RMQ-0012	19.1	12.7	4.8	8.7	6.5	5.7	19	23	·
RMQ-0014	25.4	20	4.5	8.5	8	5.6	40	71	·
RMQ-0016	31.8	25.4	7.1	10	12.7	7.9	66	132	·

品號	B	H	L	d max.φ螺絲頭	f	s	吸附力 (N)	質量 (g)	庫存
RMR-0010	22	25	17	7	-	8	30	64	△
RMR-0012	30	20	20	5		15	45	69	△
RMR-0014	39	25.4	25	4.7		19	90	151	△
RMR-0016	45	30	30	4.7		23	120	209	△
RMR-0018	57	44.5	35	8	31.5	27.8	180	498	△
RMR-0020	70	57	41	8	38	35	320	770	△
RMR-0022	79	82	54	9.5	43	38.5	470	1570	△

SP 特長

- 避免使用帶磁性的螺絲，以確保磁性不受影響
- 為方便處理和避免消磁，這些磁鐵的附著面上有鐵板

訂貨： 交期： 天 ·
RMP-0010 天 △

Wa 注意

- 吸附力為單一磁鐵的測定值(參考值)