




本體		螺帽		磁鐵			
材質	處理	材質	處理	材質	耐熱		
鋼	500 N/mm <sup>2</sup>	鍍鋅	鋼	400 N/mm <sup>2</sup>	鍍鋅	鈹磁鐵	80°C

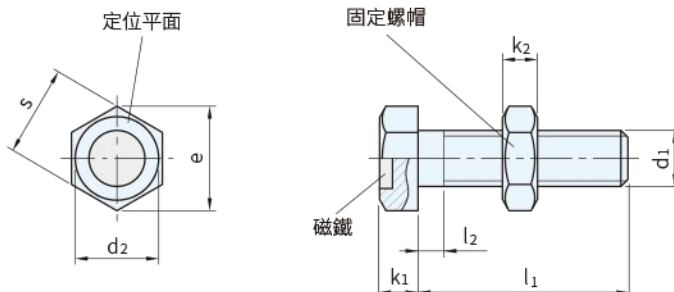

品號	d <sub>1</sub>	l <sub>1</sub>	d <sub>2</sub>	e ≈	k <sub>1</sub> -1	k <sub>2</sub>	l <sub>2</sub> max.	s	公稱吸附力 N	質量 (g)	庫存
SGR251.6-0010	M 6	12	10	11	4	3.2	3	10	25	5	•
SGR251.6-0012		16								6	•
SGR251.6-0014		20								7	•
SGR251.6-0016		25								8	•
SGR251.6-0018		30								9	•
SGR251.6-0020	M 8	16	13	14.4	5.3	4	3.7	13	50	13	•
SGR251.6-0022		20								14	•
SGR251.6-0024		25								16	•
SGR251.6-0026		30								17	•
SGR251.6-0028		40								21	•
SGR251.6-0030	M10	20	17	17.8	6.4	5	4.5	17	75	26	•
SGR251.6-0032		25								30	•
SGR251.6-0034		30								37	•
SGR251.6-0036		40								39	•
SGR251.6-0038		50								42	•
SGR251.6-0040	M12	25	19	20	7.5	6	5.2	19	110	44	•
SGR251.6-0042		30								48	•
SGR251.6-0044		40								55	•
SGR251.6-0046		50								62	•
SGR251.6-0048		60								84	•
SGR251.6-0050	M16	30	24	26.8	10	8	6	24	145	93	•
SGR251.6-0052		40								104	•
SGR251.6-0054		50								118	•
SGR251.6-0056		60								131	•
SGR251.6-0058		80								157	•

**SP** 特長

- SGR251.6為屏蔽磁鐵，利用磁鐵將工件定位
- 附螺帽，用於定位以後，固定螺絲之用

**PS** 備註

- 螺桿無法拆除
- 另有多項固定磁鐵請參閱本單元

訂貨：  交期：

SGR251.6-0010