




本體		銷子		彈簧
材質	處理	材質	顏色	材質
SCM435	染黑	SCM435	銀	SWP

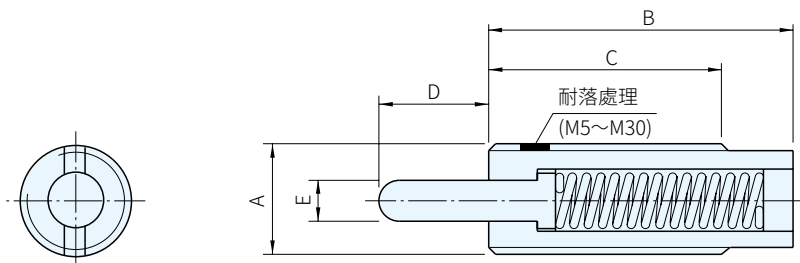

品號	A	B	C	D	E	荷重(N)	專用扳手	庫存	
						最小~最大			
SP-5LS	M5×0.8	13	13	3.0	2.0	2~8	PW-05	•	
SP-05L	M5×0.8	20	20	3.0	2.0	2~10		•	
SP-06L	M6×1	25	25	3.0	2.5	3~10	PW-06	•	
SP-08L	M8×1.25	25	25	4.0	3.1	3~10	PW-08	•	
SP-10L	M10×1.5	30	30	5.0	3.8	3~15	PW-10	•	
SP-12L	M12×1.75	30	30	5.0	5.5	2~10	PW-12	•	
SP-12-10L	M12×1.75	43	35	10.0	5.5	4~20		•	
SP-16-10LS	M16×2	50	35	10.0	8.0	10~50	PW-16	•	
SP-16-10L	M16×2	60	35	10.0	8.0	13~40		•	
SP-16-15L	M16×2	60	35	15.0	8.0	10~40		•	
SP-16-20L	M16×2	60	35	20.0	8.0	13~40		•	
SP-16-30L	M16×2	125	35	30.0	8.0	18~40		•	
SP-16-40L	M16×2	125	35	40.0	8.0	18~40		•	
SP-16-50L	M16×2	155	35	50.0	8.0	20~50		•	
SP-16-60L	M16×2	155	35	60.0	8.0	18~40		•	
SP-16-70L	M16×2	200	35	70.0	8.0	20~50		•	
SP-16-80L	M16×2	200	35	80.0	8.0	20~50		•	
SP-24-15L	M24×3	60	45	15.0	10.0	20~100		PW-24	•
SP-30-20L	M30×3.5	70	45	20.0	15.0	30~150		PW-30	•

WA. 注意

- 專用扳手請參閱PW
- 1N=0.101972kgf


PS. 備註

- 經濟型產品

訂貨： 交期： 天

SP-5LS

EX. 使用例

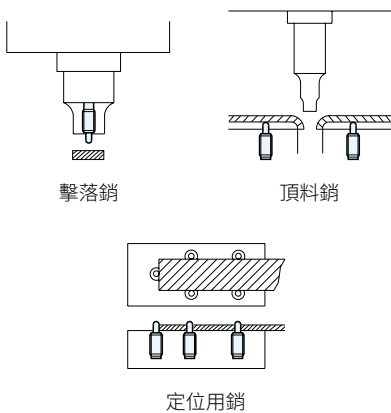

防鬆扭矩檢驗規範 (IFI 524)			
螺絲規格	首次鎖附(N.m)	首次拆卸(N.m)	第五次拆卸(N.m)
	Max	Min	Min
M1.6×0.35	0.10	0.01	0.004
M2×0.4	0.20	0.02	0.01
M2.5×0.45	0.40	0.05	0.03
M3×0.5	0.60	0.14	0.06
M3.5×1	0.90	0.22	0.11
M4×0.7	1.20	0.26	0.16
M5×0.8	2.3	0.36	0.23
M6×1	3.0	0.45	0.30
M8×1.25	10	0.90	0.58
M10×1.5	14	1.80	1.10
M12×1.75	21	2.6	1.5
M14×2	30	3.6	2.3
M16×2	40	5.0	3.4
M20×2.5	60	8.0	5.5
M24×3	90	13	8.5
M30×3.5	120	19	13
M36×4	150	28	18