





本體		銷子		彈簧
材質	處理	材質	處理	材質
鋼	染黑	鋼	硬化、染黑	SUS
SUS303	-	SUS303	氮化	
鋼	染黑	POM	-	
SUS303	-			

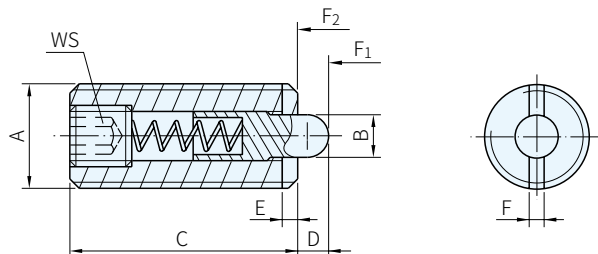


鋼	質量 g	庫存	不銹鋼	質量 g	庫存	備註	A	B	C	D	E	F	WS	荷重(N)		專用扳手
														品號	品號	
22060.0003	0.4	•	22060.0403	0.4	•	輕荷重	M3×0.5	1.0	12	1.0	0.5	0.4	0.7	2	4	22060.0903
22060.0004	0.93	•	22060.0404	1.1	•		M4×0.7	1.5	15	1.5	0.6	0.6	1.3	4.5	16	22060.0904
22060.0005	1.7	•	22060.0405	1.7	•		M5×0.8	2.4	18	2.3	0.8	1.2	1.5	6	19	22060.0905
22060.0006	2.8	•	22060.0406	2.8	•		M6×1	2.7	20	2.5	0.9	1.3	2.0	6	19	22060.0906
22060.0008	5.8	•	22060.0408	5.9	•		M8×1.25	3.5	22	3.0	1.4	1.5	2.5	10	39	22060.0908
22060.0010	9.2	•	22060.0410	9.5	•		M10×1.5	4.0	22	3.0	1.4	1.5	3.0	10	39	22060.0910
22060.0012	16.0	•	22060.0412	17.0	•		M12×1.75	6.0	28	4.0	2.0	2.7	4.0	12	53	22060.0912
22060.0016	35.0	•	22060.0416	35.0	•		M16×2	7.5	32	5.0	2.5	3.2	5.0	45	100	22060.0916
22060.0020	68.0	•	22060.0420	68.0	•		M20×2.5	10.0	40	7.0	3.0	3.7	6.0	52	125	22060.0920
22060.0024	131.0	•	-	-	•		M24×3	12.0	52	10.0	3.0	3.7	8.0	70	170	22070.0838
22060.0204	0.86	•	22060.0604	0.93	•	輕荷重 (塑膠銷)	M4×0.7	1.5	15	1.5	0.6	0.6	1.3	4.5	16	22060.0904
22060.0205	1.5	•	22060.0605	1.6	•		M5×0.8	2.4	18	2.3	0.8	1.2	1.5	6	19	22060.0905
22060.0206	2.3	•	22060.0606	2.5	•		M6×1	2.7	20	2.5	0.9	1.3	2.0	6	19	22060.0906
22060.0208	5.1	•	22060.0608	5.1	•		M8×1.25	3.5	22	3.0	1.4	1.5	2.5	10	39	22060.0908
22060.0210	8.1	•	22060.0610	8.5	•		M10×1.5	4.0	22	3.0	1.4	1.5	3.0	10	39	22060.0910
22060.0212	14.0	•	22060.0612	14.0	•		M12×1.75	6.0	28	4.0	2.0	2.7	4.0	12	53	22060.0912
22060.0216	31.0	•	22060.0616	32.0	•	M16×2	7.5	32	5.0	2.5	3.2	5.0	45	100	22060.0916	
22060.0105	1.6	•	-	-	•	重荷重	M5×0.8	2.4	18	2.3	0.8	1.2	1.5	11	40	22060.0905
22060.0106	2.8	•					M6×1	2.7	20	2.5	0.9	1.3	2.0	15	43	22060.0906
22060.0108	5.8	•					M8×1.25	3.5	22	3.0	1.4	1.5	2.5	20	75	22060.0908
22060.0110	9.3	•					M10×1.5	4.0	22	3.0	1.4	1.5	3.0	20	75	22060.0910
22060.0112	16.0	•					M12×1.75	6.0	28	4.0	2.0	2.7	4.0	45	120	22060.0912
22060.0116	33.0	•					M16×2	7.5	32	5.0	2.5	3.2	5.0	64	160	22060.0916
22060.0120	67.0	•					M20×2.5	10.0	40	7.0	3.0	3.7	6.0	75	195	22060.0920
22060.0124	129.0	•					M24×3	12.0	52	10.0	3.0	3.7	8.0	75	245	22070.0838

WA. 注意


- 專用扳手請參閱本單元
- 鋼銷使用溫度MAX.250°C
塑膠銷使用溫度-30°C~+50°C
- 1N=0.101972kgf
- 輕荷重定位珠牙部無雷射線



- 重荷重定位珠牙部有兩條雷射線



EX. 使用例



訂貨： 交期： 天

22060.0003