






扳手




本體		螺紋華司		彈簧				膠封	
				輕荷重	中荷重		重荷重		
材質	處理	材質	處理	材質	材質	處理	材質	處理	材質
鋼	鍍鋅	鋼	染黑	SUS	鋼	染黑	鋼	鍍鋅	CR

品號	備註	A	P(N)≈ max.	d ₂	d ₃	C	D -2	l ₃	l ₄	s	WS	質量 (g)	庫存
22150.1410	有膠封 輕荷重	M12	20	M 4	6.1	4.0	11.5	4.5	2.0	1.6	10	3.0	•
22150.1414							19.0					4.9	•
22150.1418							26.5					6.7	•
22150.1430							11.5					3.1	•
22150.1434		M18×1.5	40	M 6	10.1	11.5	19.0	7.5	2.3	3.2	16	5.1	•
22150.1438							26.5					6.8	•
22150.1450							18.0					14.6	•
22150.1454							31.5					23.1	•
22150.1458							45.0					31.9	•
22150.1411	有膠封 中荷重	M12	50	M 4	6.1	4.0	11.5	4.5	2.0	1.6	10	3.3	•
22150.1415							19.0					5.4	•
22150.1419							26.5					7.3	•
22150.1431							11.5					3.3	•
22150.1435		M18×1.5	75	M 6	10.1	11.5	19.0	7.5	2.3	3.2	16	5.5	•
22150.1439							26.5					7.4	•
22150.1451							18.0					14.7	•
22150.1455							31.5					23.1	•
22150.1459							45.0					32.1	•
22150.1412	有膠封 重荷重	M12	100	M 4	6.1	4.0	11.5	4.5	2.0	1.6	10	3.5	•
22150.1416							19.0					5.8	•
22150.1420							26.5					8.0	•
22150.1432							11.5					3.6	•
22150.1436		M18×1.5	200	M 6	10.1	11.5	19.0	7.5	2.3	3.2	16	6.2	•
22150.1440							26.5					8.7	•
22150.1452							18.0					14.6	•
22150.1456							31.5					23.0	•
22150.1460							45.0					32.0	•
22150.0820	專用扳手	M12	-	-	-	-	-	-	-	-	-	76.0	•
22150.0822		M18×1.5	-	-	-	-	-	-	-	-	-	137.0	•

Wa. 注意

- ・ P(N)是銷子移動的最大荷重
- ・ 使用溫度max.110°C
- ・ 裝置方法請參考後頁

Ex. 使用例

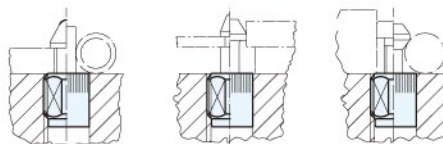
 訂貨： 交期： 天

22150.1410