



本體		把手		銷子	
材質	處理	材質	顏色	材質	處理
鋼	染黑	PA	消光黑	鋼	硬化
SUS303	-			SUS303	鍍銀
鋼	染黑	-	-	鋼	硬化
SUS303	-	-	-	SUS303	鍍銀


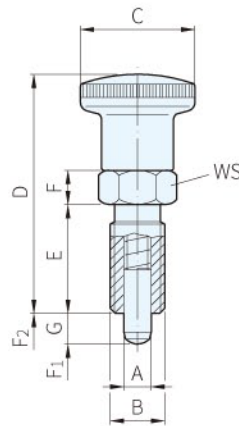


圖1
有把手

圖2
無把手

鋼 品號	庫存	不銹鋼 品號	庫存	備註	A -0.02 -0.04	B	C	D	E	F	G min.	H	J	K	N	WS	荷重(N)		質量 (g)					
																	F1≈	F2≈						
22110.0103	·	22110.0203	·	圖1 有把手	4	M 8×1.0	16	35.0	16	5	4	-	-	-	-	10	4.5	12.0	10.0					
22110.0104	·	22110.0204	·		6						6						4.0	12.5						
22110.0106	·	22110.0206	·		5	M10×1.0	19	40.0	18	6	5						5.0	15.0	12	5.0	18.0	18.0	5.0	15.0
22110.0107	·	22110.0207	·								8						6.5	19.0		6.0	25.0			
22110.0109	·	22110.0209	·		6	M12×1.5	23	48.0	22	9	6						6.5	19.0	14	6.0	25.0	29.0	8.5	26.0
22110.0110	·	22110.0210	·								8						8.5	26.0		8.5	28.0			
22110.0112	·	22110.0212	·		8	M16×1.5	28	58.0	26	8	12						9.5	38.0	17	9.5	38.0	62.0	11.5	40.0
22110.0113	·	22110.0213	·								10						11.5	40.0		128.0				
22110.0116	·	22110.0216	·								12						13.0	54.0		204.0				
22110.0117	·	22110.0217	·		16	M24×2.0	33	78.5	38	12	20											27	13.0	54.0
22110.0143	·	22110.0243	·	圖2 無把手	4	M 8×1.0	-	-	16	5	4	2.5	7	4.5	M3	10	4.5	12.0	9.0					
22110.0144	·	22110.0244	·		6								6	4.0	12.5									
22110.0146	·	22110.0246	·		5	M10×1.0			18	6	5	3.0	8	5.5	M4	12	5.0	15.0	16.0	5.0	18.0			
22110.0147	·	22110.0247	·								8	6.5	19.0	6.0	25.0									
22110.0149	·	22110.0249	·		6	M12×1.5			22	9	3.5	9	7.0	M5	14	6.5	19.0	25.0	6.0	25.0				
22110.0150	·	22110.0250	·								8	8.5	26.0	8.5	28.0									
22110.0152	·	22110.0252	·		8	M16×1.5			26	8	12	4.0	10	8.5	M6	17	8.5	28.0	55.0	9.5	38.0			
22110.0153	·	22110.0253	·								10	11.5	40.0	111.0										
22110.0155	·	22110.0255	·								12	13.0	54.0	194.0										
22110.0156	·	22110.0256	·		12	M20×1.5			33	10	15	12							22	11.5	40.0	111.0		
22110.0157	·	22110.0257	·	16			M24×2.0	38			12	20	5.0	15	11.5	M8	27	13.0	54.0	194.0				
22120.0114	·	22120.0514	·	螺帽			M 8×1.0	-			-	-	-	-	-	-	-	-	-	-	-	-	2.7	
22120.0115	·	22120.0515	·				M10×1.0																5.2	
22120.0116	·	22120.0516	·		M12×1.5	7.4																		
22120.0118	·	22120.0518	·		M16×1.5	18.0																		
22120.0120	·	22120.0520	·		M20×1.5	32.0																		
22120.0122	·	22120.0522	·		M24×2.0	58.0																		

Sp. 特長


- 把手/螺牙部上拉，銷子內縮，定位解除。手放鬆後，銷子由內藏彈簧自動回位，是一種手操作的定位柱
- 螺牙有逃角，定位柱可完全鎖到底部
- 圖1使用溫度-30°C~+80°C，圖2使用溫度max.250°C

訂貨： 交期： 天 有庫存
22110.0103 天 無庫存


Ps. 備註

- 螺帽22120需另外購買


Ex. 使用例




銷子定位



把手部上拉，銷子內縮



銷子定位

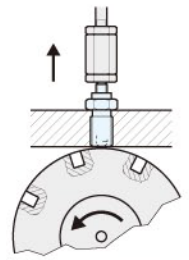

螺牙部上拉，銷子內縮