



本體		銷子	彈簧	把手・保護套	
材質	處理	材質	材質	材質	顏色
鋼	鍍鋅・鈍化	SUS303	SUS301	PA	黑


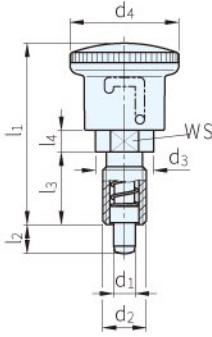


圖1  
銷子外伸



銷子內藏鎖固

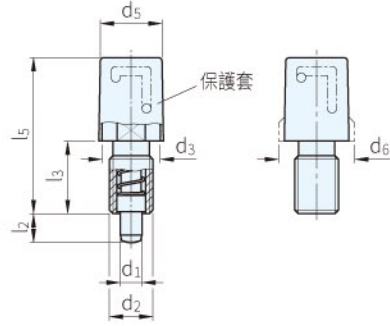


圖2  
銷子外伸

銷子內藏鎖固




圖3

配合圖2使用



品號	備註	d <sub>1</sub> 0 -0.05	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	d <sub>6</sub>	l <sub>1</sub> ≈	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub> ≈	l <sub>5</sub>	WS	荷重(N) ≈		質量 (g)	庫存
														初荷重	末荷重		
SGR816-010	圖1 把手操作	6	M12×1.5	16	28	-	-	50	8	20	6	-	14	13	28	50	•
SGR816-012		8	M16×1.5	18				52	10	22			16	14	38	55	•
SGR816-014	圖2 鑰匙操作	6	M12×1.5	16	-	17	-	50	8	20	-	43	-	13	28	50	•
SGR816-016		8	M16×1.5	18				20	52	10		22		48	14	38	55
SGR816-10	圖3 鑰匙	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	•
22120.0116	螺帽	-	M12×1.5	-	-	-	-	-	-	-	-	-	-	-	-	9	•
22120.0118			M16×1.5	-	-	-	-	-	-	-	-	-	-	-	-	18	•

**Sp. 特長**


- ・不使用狀況下，銷子外露本體之外，旋轉90°即縮回固定
- ・圖2可以選購鑰匙SGR816-10搭配使用

**Wa. 注意**


- ・鑰匙為另購品
- ・螺帽22120需另外購買
- ・建議 $\phi d_1$ 配合孔公差  $^{+0.15}_{+0.07}$

**Ex. 使用例**

調整環  
SGR609.5



鎖入螺紋



套上保護套

訂貨：  交期：  天

SGR816-010