

RoHS



本體		銷子	彈簧	把手・保護套	
材質	處理	材質	材質	材質	顏色
鋼	鍍鋅・鈍化	SUS303	SUS301	PA	黑


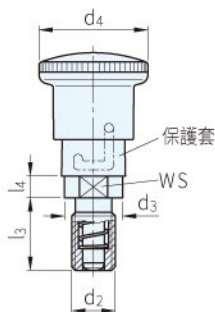


圖1  
銷子內藏

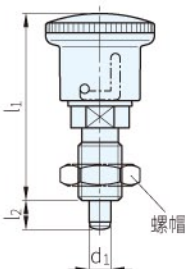

銷子外伸鎖固

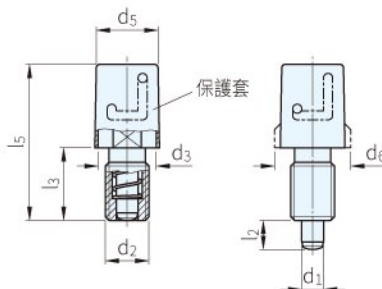


圖2  
銷子內藏 銷子外伸鎖固




圖3  
配合圖2使用



品號	備註	d <sub>1</sub> 0 -0.05	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	d <sub>6</sub>	l <sub>1</sub> ≈	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub> ≈	l <sub>5</sub>	WS	荷重(N) ≈		質量 (g)	庫存
														初荷重	末荷重		
SGR816.1-010	圖1 把手操作	6	M12×1.5	16	28	-	-	51.5	8	20	6	-	14	12	27	50	•
SGR816.1-012		8	M16×1.5	18	-	-	-	54.5	10	22	-	-	16	35	55	•	
SGR816.1-014	圖2 鑰匙操作	6	M12×1.5	16	-	17	-	-	8	20	-	43	-	12	27	50	•
SGR816.1-016		8	M16×1.5	18	-	-	20	-	10	22	-	48	-	35	55	•	
SGR816.1-10	圖3 鑰匙	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	•
22120.0116	螺帽	-	M12×1.5	-	-	-	-	-	-	-	-	-	-	-	-	9	•
22120.0118		-	M16×1.5	-	-	-	-	-	-	-	-	-	-	-	-	18	•


**Sp. 特長**

- ・ 不使用狀況下，銷子縮回本體之內，旋轉90°即彈出固定
- ・ 圖2可以選購鑰匙SGR816.1-10搭配使用

**Wa. 注意**

- ・ 鑰匙為另購品
- ・ 螺帽22120需另外購買
- ・ 建議φd<sub>1</sub>配合孔公差 +0.15 / +0.07

**Ex. 使用例**

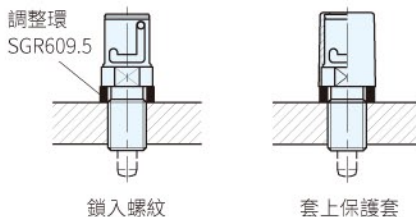

訂貨：  交期：  天

SGR816.1-010