




材質	處理
S45C	高週波熱處理

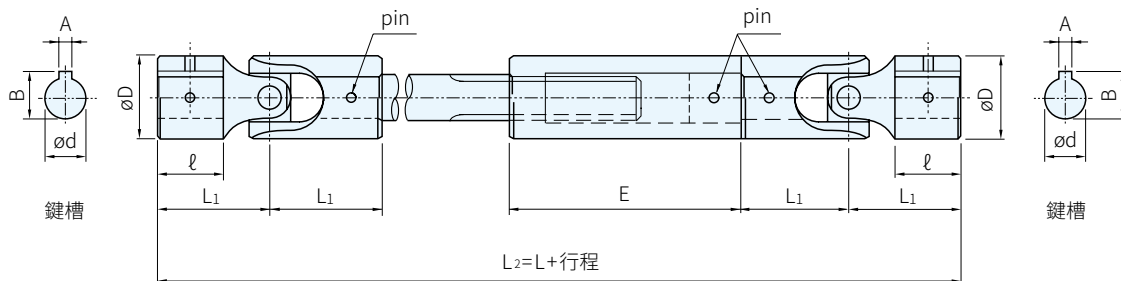

TYPE	d	D	L ₁	ℓ	E	鍵槽 A×B JS9	扭力 (kgf-m)	靜荷載 (kgf-m)	閉總長 L min.~max. (指定單位1mm)	行程 mm	開總長 L ₂
KHS-10	10	20	22.5	13	75	3×11.8	2.2	8.0	165~305	+30	閉總長L+行程
KHS-12	12	24	25.5	14	80	4×13.8	4.3	14.0	182~335		
KHS-14	14	28	30.5	17	85	5×16.3	6.5	20.0	207~385		
KHS-16	16	32	34.5	19	110	5×18.3	10.5	27.0	248~430	+40	
KHS-18	18	36	38.5	21	115	5×20.3	11.0	35.0	269~480		
KHS-20	20	40	43.5	24	125	6×22.8	18.4	55.0	299~580		
KHS-22	22	44	47.5	26	130	6×24.8	20.5	75.0	320~680	+50	
KHS-25	25	50	55.5	30	150	8×28.3	38.0	100.0	372~775		
KHS-30	30	60	65.0	37	175	8×33.3	50.0	200.0	435~850		

訂貨： TYPE - 閉總長L 交期： 8 天

KHS-10 - 165