


BUTT HINGE GS-D-S-C

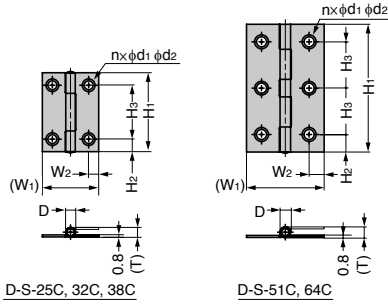

[Remarks]

- Dimensions in the following drawing are for reference. Please confirm with actual item when installing.
- When installing this hinge to sheet metal, be sure to perform thread relief processing (chamfering) on the mounting surface side (cabinet side). In this way, screw head will not protrude when the hinge is fixed.
- Product movement and edge processing vary. Please check with actual item.
- Load capacity is the value when using two hinges. For calculation conditions, please refer to INDEX

[Parts Included]

- Countersunk head wood screw (SUS)

| Item Name | Material | Finish | H ₁ | H ₂ | H ₃ | W ₁ | W ₂ | D | T | d ₁ | d ₂ | Knuckles | Holes n | Screw | Load Capacity | Load Capacity | Weight | Box | Carton |
|------------|-----------|----------|----------------|----------------|----------------|----------------|----------------|-----|-----|----------------|----------------|----------|------------|----------|---------------|---------------|--------|-------|--------|
| | | | | | | | | | | | | | | | N/2 pcs | kg/2 pcs | (g) | (pcs) | (pcs) |
| GS-D-S-25C | Stainless | Polished | 25.5 | 5 | 15.5 | 21 | 3.5 | 3.8 | 3.8 | 3.5 | 5.1 | 3 | 4 | 2.4 x 10 | 20 | 2 | 4.4 | 100 | 3000 |
| GS-D-S-32C | | | 31.5 | | 21.5 | 22.5 | 4 | | | | | | | | 5.7 | 100 | 3000 | | |
| GS-D-S-38C | Steel | Polished | 38 | 5.5 | 27 | 26 | 5 | 3.9 | 3.9 | 3.8 | 5.6 | 5 | 6 | 2.7 x 13 | 29 | 3 | 7.7 | 50 | 2000 |
| GS-D-S-51C | (SUS430) | | 51 | 7 | 18.5 | 31 | 6 | 4.2 | 4.2 | 4 | | | | | 12.9 | 50 | 1500 | | |
| GS-D-S-64C | | | 64 | 9 | 23 | 33 | 6.2 | | | | | 6 | 19.4 | 50 | 1000 | | | | |