


# GASKET GS-CR

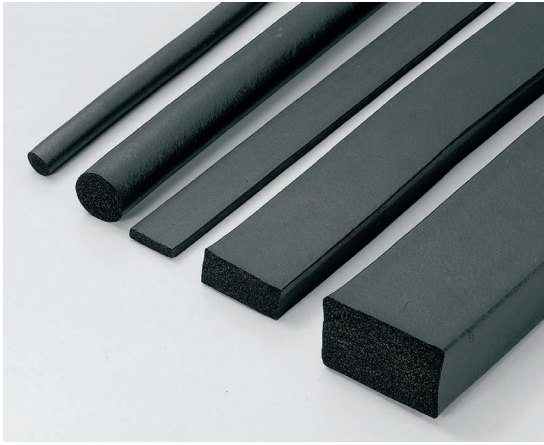

- A variety of materials, sizes and cross-sectional shapes available for different purposes.

### [Applications]


- Instrument, control boards, machine tools, home appliances, medical equipment, furniture, and office equipment, etc.

### [Remarks]

- Sold in metres. Specified length and multiple cutting can be made to order.

### [Property of Chloroprene Gasket]

Material	CR	
Colour	Black	
Apparent Density (g/cm <sup>3</sup> )	0.40	
Hardness	20 (Durometer: type E)	
Tensile Strength (MPa)	1.5	
M100 (100% Modulus) (MPa)	0.3	
Elongation (%)	300	
Coefficient of Water Absorption (wt%)	Max. 5	
Compressive Stress (gf/cm <sup>2</sup> )	400	
Ozone Resistance	48hr Non-GS-CRack	
Operating Temperature (°C)	-25~100	
Heat Aging Resistance	Hardness	22
	Elongation (%)	250

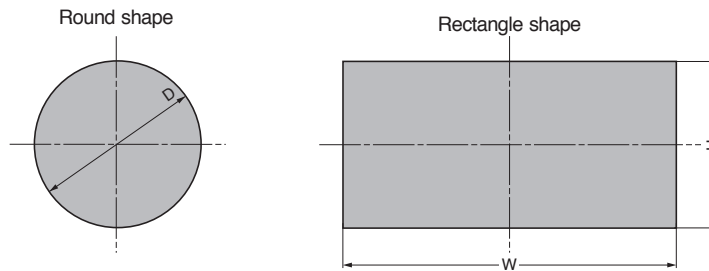

### [Round Shape]

Item Name	D	Length m/Roll	Weight (g)
GS-CR-M4	4	300	7.0
GS-CR-M5	5		14.2

### [Rectangle Shape]

Item Name	W	H	Length m/Roll	Weight (g)
GS-CR-1003	10	3	200	30.5
GS-CR-2003	20			26.3
GS-CR-3003	30			39.5
GS-CR-1505	15	5	100	32.0
GS-CR-2505	25			41.3
GS-CR-2006	20			48
GS-CR-1508	15	8	100	70.0
GS-CR-2010	20	10		107.6
GS-CR-2510	25	15		90.6
GS-CR-2515		15	150	
GS-CR-2518		18	180	
GS-CR-4025	40	25	25	400