

T-SHAPED HOLDER FOR POINT FIX GS-PTH



- For point fix (sold separately).
- Used for installing glass to the handrail post with point fix. Please use with point fix recommended in the table below.
- M5 screw type (GS-PTH-5) and M8 screw type (GS-PTH-8) available.
- Non-Handed. Can be installed on left or right side.
- Adjustment range: vertical ± 5 mm, depth 4mm. Horizontal adjustment is possible by using point fix (GS-PTH-8 only).
- Ideal for exterior application. Acceptable glass weight: 36kg (4 pcs, vertical mounting).



[Remarks]

- When installing the recommended point fix to the glass, either special tool GS-Z058, GS-Z059, (sold separately) or hex key (nominal 6) is required. Special tools vary depending on the point fix used. Please confirm with the table below.
- When adjusting the depth adjustment screw and body of GS-PTH-5 or GS-PTH-8, special tool GS-Z058 or GS-Z059 is required.

[Recommended Screws]

- Hexagon socket button head screw M10
- Recommended tightening torque: 44 N·m (443 kgf·cm)

[Application Example]

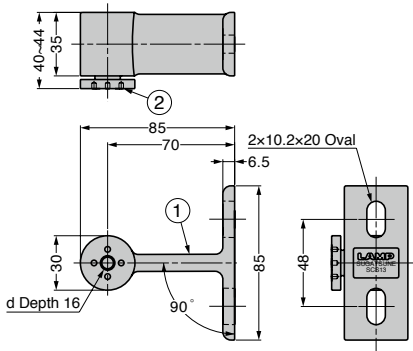

No.	Part Name	Material	Finish
①	Body	SCS13	Polished
②	Depth Adjustment Screw	Stainless Steel (SUS304)	Satin

※SCS13 is equivalent of SUS304.

[Body]

Item Name	d	Weight (g)
GS-PTH-5	M5	419
GS-PTH-8	M8	413

[Special Tool] Sold Separately



GS-Z059 GS-Z058

Item Name	Weight (g)
GS-Z059	38
GS-Z058	111

[Recommended Point Fix] Sold Separately

Item Name	Horizontal Adjustment	T-shaped Holder	Special Tool	Weight (g)
GS-PE-20SR	-	GS-PTH-5	GS-Z059	51.7
GS-PE-20ST				56.0
GS-PE-32SR	± 3	GS-PTH-8	GS-Z058	112.0
GS-PE-32ST				140.0
GS-PE-40SR				182.0