

CABLE GROMMET **GS-LSUKS/GS-LSKS** Square/One-sided




- The cap is removable for wide opening.
- Body can be fixed with nails to prevent rotation. When installing, please use nails to pierce into the 2 thin-walled locations on the backside of the body.
- Recommended nail: Pan head nail 1.2 x 10
 - Head diameter : 4mm or less
 - Shank diameter: 1.9mm or less



[Remarks]

- Please install by pushing into place.
- Please use an adhesive when installing on a metal sheet.

[Cut Out Dimensions]



[Components]

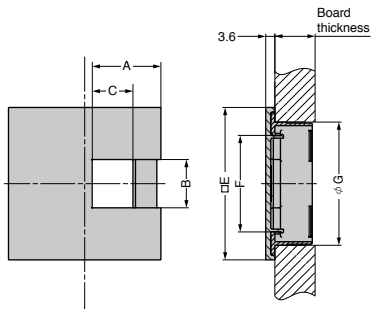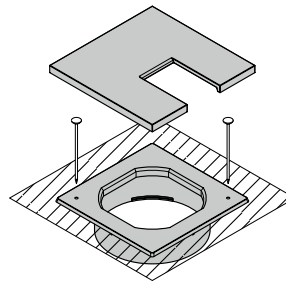

GS-LSU60KS / GS-LS60KS / GS-LS76KS

[GS-LSU60KS] Size: 60 mm / Low-profile type

Item Name	Colour	Material	A	B	C	E	F	G	d	Board Thickness	Weight (g)
GS-LSU60KS-WT	White	ABS	27	19	16.1	60	38	48.5	48	Min. 12	12
GS-LSU60KS-BE	Beige										
GS-LSU60KS-LBR	Light Brown										
GS-LSU60KS-DBR	Dark Brown										
GS-LSU60KS-BL	Black										

[GS-LS60KS] Size: 60 mm

Item Name	Colour	Material	A	B	C	E	F	G	d	Board Thickness	Weight (g)
GS-LS60KS-WT	White	ABS	27	19	16.1	60	38	48.5	48	Min. 16	13
GS-LS60KS-BE	Beige										
GS-LS60KS-LBR	Light Brown										
GS-LS60KS-DBR	Dark Brown										
GS-LS60KS-BL	Black										

[GS-LS76KS] Size: 76 mm

Item Name	Colour	Material	A	B	C	E	F	G	d	Board Thickness	Weight (g)
GS-LS76KS-WT	White	ABS	34	22	22.8	76	53.5	64.5	64	Min. 25	22
GS-LS76KS-BE	Beige										
GS-LS76KS-LBR	Light Brown										
GS-LS76KS-DBR	Dark Brown										
GS-LS76KS-BL	Black										