

SLIDING DOOR ROLLER GS-JC150 Flat Type w/o Bracket

Made to Order



- Non-bracket type of GS-JC140
- For wheel diameter above $\phi 75$, bearing with rubber seal (dustproof seal type) provides excellent water resistance.
- Ideal for exterior application.
- 2 bearings are used for wheel diameter above $\phi 75$, providing smooth movement even for heavy doors.

[Applications]


- Gates, etc.

[Remarks]

- Core rod for wheel diameter $\phi 50 \sim \phi 120$ is not grooved for E-ring. Core rod for $\phi 150 \sim \phi 200$ consists of one bolt and one nut.
- The shape of core rod varies depending on its size. Please confirm with the figure below.

[Parts Included]

- Wheel shaft

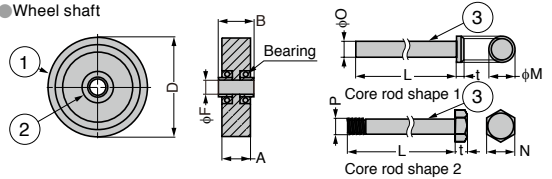

No.	Part Name	Material	Finish
①	Wheel	Ductile Cast Iron	Black Enamel Finish
②	Bearing	-	-
③	Core Rod	Steel (SWCH)	-

Item Name	D	A	B	F	L	M	N	O	P	t	Weight (kg)	Core Rod Shape
GS-JC150-50F	50	20	25								0.3	1
GS-JC150-60F	60		30							4	0.4	
GS-JC150-75F	75	26	29	13	75	19	-	12.9	-		0.7	
GS-JC150-90F	90									5	1	
GS-JC150-100F	105					24		15.9			1.3	
GS-JC150-120F	120	28	32	16							1.6	
GS-JC150-150F	150	43	48	20	100	-	30	-	M20	13	4.2	2
GS-JC150-200F	200	50	58	24	120		36		M24	15	8.5	