

SLIDING DOOR ROLLER GS-JC145 U Type w/o Bracket

Made to Order



- Non-bracket type of GS-JC135
- For wheel diameter above $\phi 75$, bearing with rubber seal (dustproof seal type) provides excellent water resistance.
- Ideal for exterior application.
- 2 bearings are used for wheel diameter above $\phi 75$, providing smooth movement even for heavy doors.

[Applications]

- Gates, etc.


[Remarks]

- Core rod for wheel diameter $\phi 50 \sim \phi 120$ is not grooved for E-ring. Core rod for $\phi 150 \sim \phi 200$ consists of one bolt and one nut.
- The shape of core rod varies depending on its size. Please confirm with the figure below.


[Parts Included]

- Wheel shaft

[Application Example]



No.	Part Name	Material	Finish
①	Wheel	Ductile Cast Iron	Black Enamel Finish
②	Bearing	-	-
③	Core Rod	Steel (SWCH)	-

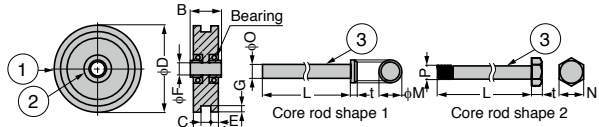

Item Name	D	A	B	C	E	F	G	L	M	N	O	P	t	Weight (kg)	Core Rod Shape
GS-JC145-50H	50	20	25		6.3		5							0.2	1
GS-JC145-60H	60		30	7.5	9.3	13	6		19		12.9		4	0.4	
GS-JC145-75H	75	26						75						0.6	
GS-JC145-90H	90		29	10.5	7.8									0.9	
GS-JC145-100H	105	28	32	14	7	16	8		24		15.9		5	1.1	
GS-JC145-120H	120													1.3	
GS-JC145-150H	150	43	48		8	20	10	100		30		M20	13	3.4	2
GS-JC145-200H	200	50	58	27	11.5	24	14	120		36		M24	15	7	