

SLIDING DOOR ROLLER GS-JC110 V Type w/o Bracket



- Non-bracket type of GS-JC100
- For wheel diameter above $\phi 75$, bearing with rubber seal (dustproof seal type) provides excellent water resistance.
- Ideal for exterior application.
- 2 bearings are used for wheel diameter above $\phi 75$, providing smooth movement even for heavy doors.

[Applications]



- Gates, etc.

[Remarks]

- Core rod for wheel diameter $\phi 50\sim\phi 120$ is not grooved for E-ring. Core rod for $\phi 150\sim\phi 200$ consists of one bolt and one nut.
- The shape of core rod varies depending on its size. Please confirm with the figure below.

[Parts Included]

- Wheel shaft

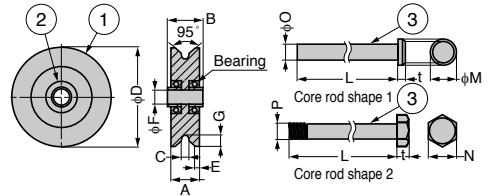

[Application Example]

No.	Part Name	Material	Finish
①	Wheel	Ductile Cast Iron	Black Enamel Finish
②	Bearing	-	-
③	Core Rod	Steel (SWCH)	-

Item Name	D	A	B	C	E	F	G	L	M	N	O	P	t	Weight (kg)	Core Rod Shape
GS-JC110-50V	50	20	25	5	4.7		6							0.2	1
GS-JC110-60V	60		30		5.7	13	8		19	12.9			4	0.4	
GS-JC110-75V	75	26			4.5		8.5	75						0.5	
GS-JC110-90V	90		29	7	4.6		9							5	
GS-JC110-100V	105													1.1	
GS-JC110-120V	120	28	32		4.8	16	11		24	15.9				1.3	
GS-JC110-150V	150	43	48	13.5	7.7	20	18	100		30		M20	13	3.3	2
GS-JC110-200V	200	50	58	15	7	24	20	120		36		M24	15	7	