

TWIN WHEEL CASTER **GS-FPU55N** Threaded Bolt Type

LOAD CAPACITY 490 N




- Wheels are coated in elastomer which absorbs vibration and gives an extra smooth and quiet movement.
- With red indicator to show locked state.

[Remarks]

- Push the stopper to handle. Red lock indicator means locked state.
- The load capacities in the table below indicate the loads when moving on a smooth surface.
- The threaded bolt has a dished dent at the upper end for N10 only.

| Item Name | Type | d | Load Capacity N/pc | Load Capacity kgf/pc | Weight (g) |
|---------------|---------------|------|--------------------|----------------------|------------|
| GS-FPU55N3SR | With Brake | W3/8 | 490 | 50 | 128 |
| GS-FPU55N3R | Without Brake | | | | 123 |
| GS-FPU55N10SR | With Brake | M10 | | | 128 |
| GS-FPU55N10R | Without Brake | | | | 123 |
| GS-FPU55N12SR | With Brake | M12 | | | 128 |
| GS-FPU55N12R | Without Brake | | | | 123 |

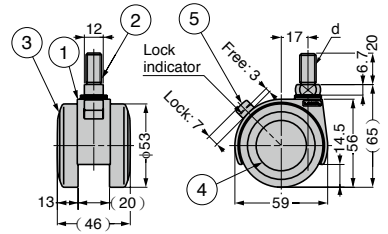

| No. | Part Name | Material | Finish/Colour |
|-----|---------------|----------------------|------------------------|
| ① | Body | PA | Black |
| ② | Threaded Bolt | Steel (SWCH) | Coloured Zinc Chromate |
| ③ | Wheel | PA + Elastomer (TPE) | Black |
| ④ | Cover | PA | |
| ⑤ | Stopper | | |