




- Wheels are coated in elastomer which absorbs vibration and gives an extra smooth and quiet movement.
- With red indicator to show locked state.

[Remarks]

- Push the stopper to handle. Red lock indicator means locked state.
- The load capacities in the table below indicate the loads when moving on a smooth surface.
- The threaded bolt has a dished dent at the upper end for N10 only.

Drawing above shows the model with brake.

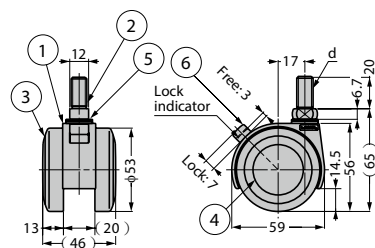

Item Name	Type	d	Load Capacity N/pc	Load Capacity kgf/pc	Weight (g)
GS-FAU55N3SR	With Brake	W3/8	686	70	155
GS-FAU55N3R	Without Brake				151
GS-FAU55N10SR	With Brake	M10			155
GS-FAU55N10R	Without Brake				151
GS-FAU55N12SR	With Brake	M12			155
GS-FAU55N12R	Without Brake				151

No.	Part Name	Material	Finish/Colour
①	Body	Aluminium Alloy (ADC)	Silver Enamel Finish
②	Threaded Bolt	Steel (SWCH)	Coloured Zinc Chromate
③	Wheel	PA + Elastomer (TPE)	Black
④	Cover	PA	
⑤	Bush		
⑥	Stopper		Black + Red