

GLASS DOOR LOCK GS-6300-D





- For metal-framed glass doors or sheet metal double sliding doors.
- Easy installation. Just 10mm bore required on the door.
- When locking, insert cylinder along with key into the bore. Turn the key to lock and remove the key.
- Remove cylinder along with key to unlock.
- 96 key changes available.

[Remarks]

- Be sure to read the "Cautions"

[Installation]

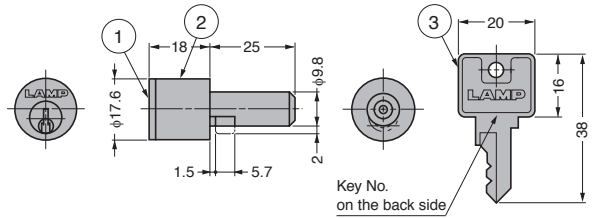

Item Name	Key Type	Cylinder Diameter	Frame Thickness	Door Thickness	Weight (g)
GS-6300-D	Key Alike	9.8	19	1.2	50

No.	Part Name	Material	Finish
①	Body	Zinc Alloy (ZDC)	White Bronze Plating
②	Cylinder Case	Brass	Nickel
③	Key		
-	Key Ring	Steel	