

PANEL LATCH GS-LC-PK32, GS-LC-PL32 Quick Installation



GS-LC-PK32-L-BL

GS-LC-PL32-GR




GS-LC-PL32-L-GR (sold separately)




GS-LC-PK32-K (sold separately)

- Two types of lock/unlock methods available: lever type and key type.
- Lever and key are compatible.
- Turning the lever or key 90° counterclockwise to unlock the latch.
- With temporary holding function that holds the latch in unlocked state. Even if multiple latches are installed, door can also be opened at once by keeping all of them temporarily held.
- Key type prevents the door from opening unexpectedly.
- Compliant with flame retardancy standard UL94 V-0. Built-in spring is made of stainless steel (SUS304).

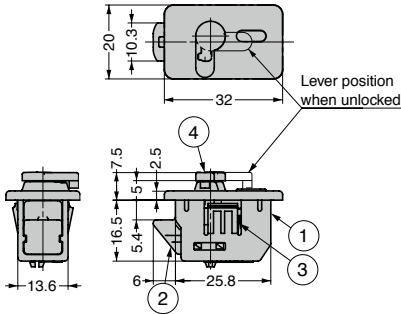


GS-LC-PL32 type shown.

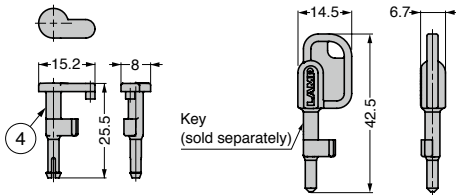


No.	Part Name	Material
①	Body	PP
②	Latch	PBT
③	Spring	Stainless Steel (SUS304)
④	Lever ※	PBT

※The lever attached to GS-LC-PL32 is the same as the optional lever.

[Cut Out Dimensions]




[Application Example]




[Quick Installation]

1. When inserting the body in the mounting hole, the hook is stored inside the body.
2. After installing, the hook returns to its original position.




[How to Install the Lever]

1. Insert the lever straight.
2. Until it snaps, check if the lever tip completely protrudes the body bottom.

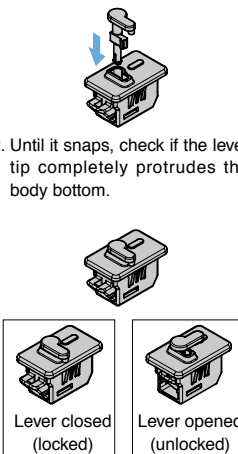

[How to Unlock with Key]

1. Insert the key.
2. Turn the key left by 90°.
3. The latch is stored in the body. At this moment, the latch will not return to its original position even if you release the key.

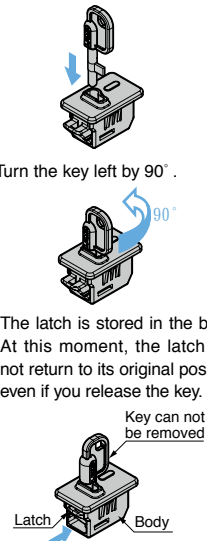

[Body]

Item Name	Colour	Door thickness	Description	Weight (g)
GS-LC-PK32-L-BL	Black	1.2, 1.5, 1.6	Without Lever	6
GS-LC-PK32-L-GR	Grey			6
GS-LC-PL32-BL	Black		With Lever	7
GS-LC-PL32-GR	Grey			7

[Lever] Sold Separately

Item Name	Colour	Weight (g)
GS-LC-PL32-L-BL	Black	1
GS-LC-PL32-L-GR	Grey	1

[Key] Sold Separately

Item Name	Material	Finish	Weight (g)
GS-LC-PK32-K	Zinc Alloy (ZDC)	Nickel	7