


# ALUMINIUM PIPE HANDLE GS-MTH

**LOAD CAPACITY 500 N** **TEST METHOD 1**

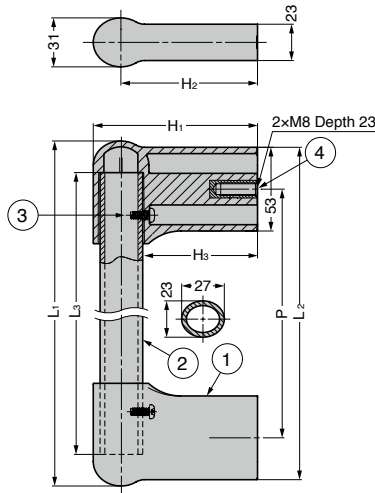

- Position of bracket (GS-MTH-T) is higher than common handles, suitable for inset sliding door of machine tool.
- GS-MTH-L with the same height as common handles for total coordination with handle of machine tool.
- Pipe and bracket are connected with screws, preventing pipe loosening and idling.
- Elliptical pipe shape allows for easy gripping and sliding.

**[Applications]**

- Machine tools and large doors, etc.

**[Remarks]**

- For single-sided mount. Cannot be used for double-sided mount.

**[Recommended Screws]**

- M8 screw

No.	Part Name	Material	Finish / Colour
①	Bracket	Glass Filled Polyamide	Black
②	Pipe	Aluminium Alloy	Anodised Silver
③	Countersunk head tapping screw 5x 12	Steel	Coloured Zinc Chromate (Trivalent)
④	Nut	Brass	Plain

Item Name	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	P	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	Load Capacity N	Load Capacity kgf	Weight (g)
GS-MTH-L300	360	352	320	300				500	51	360
GS-MTH-L450	510	502	470	450	74	56.5	43			445
GS-MTH-L600	660	652	620	600						530
GS-MTH-T300	360	352	320	300						430
GS-MTH-T450	510	502	470	450	104	86.5	73			515
GS-MTH-T600	660	652	620	600						600