

LINEAR BALL BEARING GUIDE GS-TSSL


SUS



- Inner and outer members are supported with 3 steel balls for smooth movement.
- Inner member is located inside the retainer for precise movement.

[Remarks]

- Movement is affected by the use environment. Please check with actual item.
- Do not use for vertical movement.

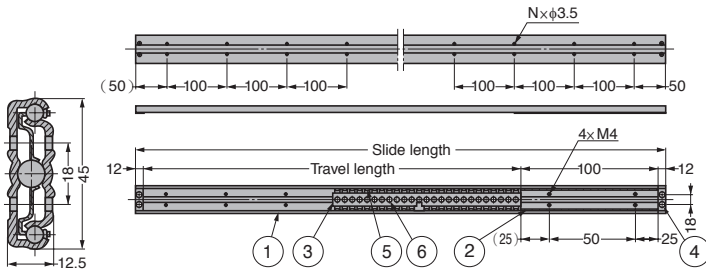

No.	Part Name	Material	Finish/Colour
①	Outer Member	Stainless Steel (SUS304)	Plain
②	Inner Member		
③	Retainer		
④	End Stopper	PA	Black
⑤	Balls	Carbon Steel	-
⑥			

Sold by piece.

Item Name	Slide Length	Travel Length	Holes N	Weight (kg/pc)
GS-TSSL-300-100	300	176	6	0.44
GS-TSSL-400-100	400	276	8	0.57
GS-TSSL-500-100	500	376	10	0.68
GS-TSSL-600-100	600	476	12	0.82
GS-TSSL-800-100	800	676	16	1.04
GS-TSSL-1000-100	1000	876	20	1.33