


3/4 EXTENSION SLIDE GS-RKA5

LOAD CAPACITY 147 N/pair

DETACH

CATCH

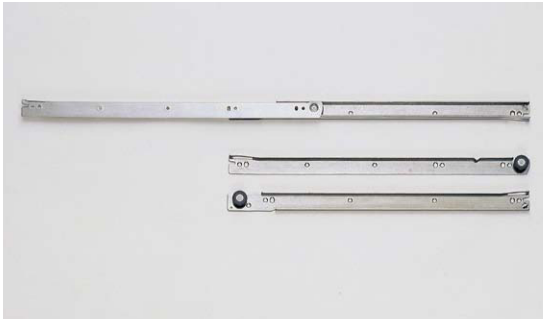


- 3/4 extension (2 members).
- R-shaped (inclined) slide ends allow complete closing.
- Urethane roller provides silent and smooth movement.
- Reduced in left and right backlash of the drawer.

[Remarks]

- Be sure to read the "Cautions"

[Recommended Screws]


- M3/M3.5 countersunk head tapping screw or M3/M3.5 countersunk head screw

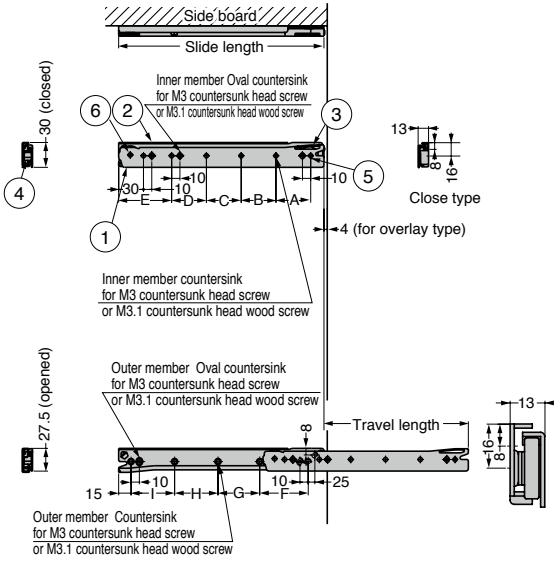

Right-handed shown.
(Right inner member: Close type)


Side view of left slide shown.
(Left inner member: Open type)

[Application Example]



Dimension marked with ※ is that required for drawer attaching/detaching.

[Installing to Metal]



No.	Part Name	Material	Finish/Colour
①	Inner Member	Stainless Steel (SUS430)	-
②	Outer Member		
③	Roller	PUR/POM	Black/White
④	Rail Guide	POM	White
⑤	Roller Washer	Stainless Steel (SUS430)	-
⑥	Shaft		

Sold in pairs (2 pcs).

Item Name	Slide Length	Travel Length	Inner Member						Outer Member						Load Capacity N/pair	Load Capacity kg/pair	Weight (kg/pair)
			A	B	C	D	E	Holes	F	G	H	I	Holes				
GS-RKA5-300-SUS430	296	205	165	-			115	6	112.5	112.5	-		6	147	15	0.48	
GS-RKA5-350-SUS430	346	250	105	105	-		120	7	91.5	92	91.5					0.57	
GS-RKA5-400-SUS430	396	295	127.5	127.5			125	7	108.5	108	108.5					0.65	
GS-RKA5-450-SUS430	446	340	100	100	100		130	8	125	125	125					0.7	
GS-RKA5-500-SUS430	496	380	113	114	113		140	8	106	106.5	106.5	106				0.82	
GS-RKA5-550-SUS430	546	420	126.5	127	126.5		150	8	119	118.5	118.5	119				0.9	
GS-RKA5-600-SUS430	596	460	105	105	105	105	160	9	131.5	131	131	131.5	8			0.98	