


3/4 EXTENSION SLIDE GS-ESR5 For Heavy Duty

LOAD CAPACITY 785-1118 N/pair

L=R SUS

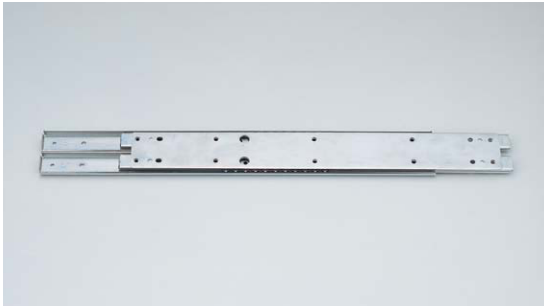


● 3/4 extension (2 members).

[Remarks]

● Be sure to read the "Cautions"

[Recommended Screws]

● M4 binding head screw or M4 truss head screw

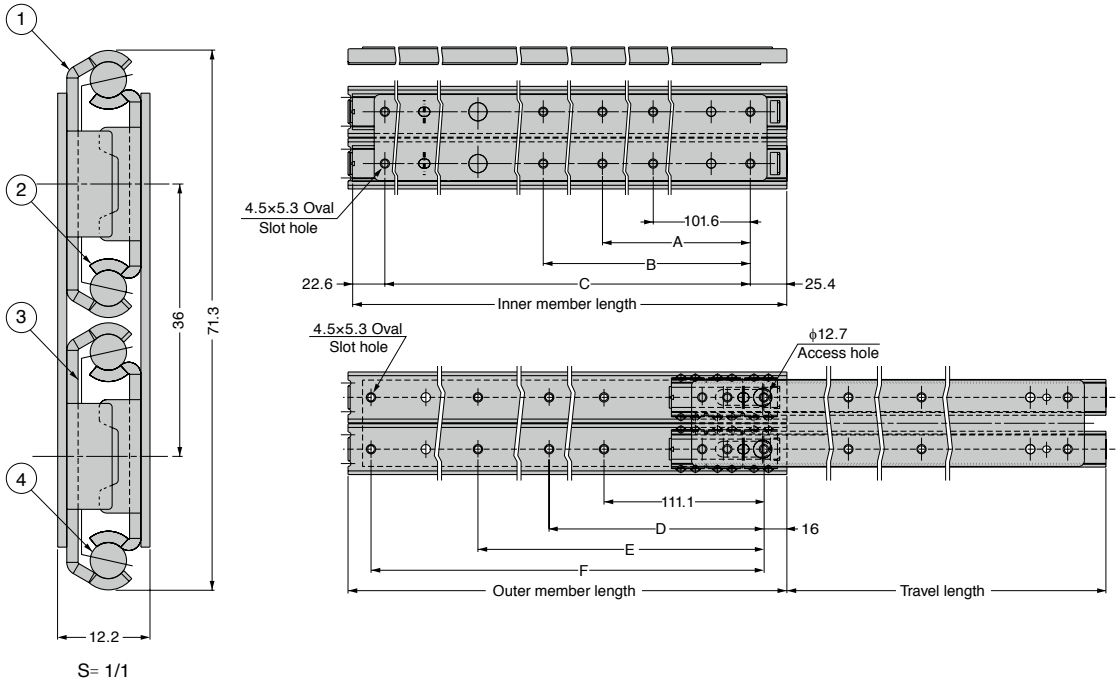

No.	Part Name	Material	Finish
①	Outer Member	Stainless Steel (SUS304)	Polished
②	Inner Member		
③	Retainer		Plain
④	Balls		

Sold by piece.

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	Holes		Load Capacity N/pair	Load Capacity kg/pair
									Inner Member	Outer Member		
GS-ESR5-12	305	221.8		152.4	254		149.2	273	6	8	1118	114
GS-ESR5-14	355.8	259.9	-	203.2	304.8	-	200	323.8			1069	109
GS-ESR5-16	406.6	298		254	355.6		250.8	374.6	6	10	1020	104
GS-ESR5-18	457.4	348.8	203.2	304.8	406.4	212.7	301.6	425.4			1000	102
GS-ESR5-20	508.2	361.5	228.6	355.6	457.2	238.1	352.4	476.2	6	10	971	99
GS-ESR5-22	559	425	254	406.4	508	263.5	403.2	527			922	94
GS-ESR5-24	609.8	450.4	279.4	457.2	558.8	288.9	454	577.8	6	10	873	89
GS-ESR5-26	660.6	463.1	304.8	508	609.6	314.3	504.8	628.6			843	86
GS-ESR5-28	711.4	501.2	330.2	558.8	660.4	339.7	555.6	679.4	6	10	785	80