

FULL EXTENSION SLIDE GS-ESR7

LOAD CAPACITY 355~623 N/pair

L=R

LOCK OPENED

DETACH

SUS







- Full extension (3 members).
- The drawer can be held in fully opened position. Released by lever operation.
- The drawer is detachable by lifting the lever.

[Remarks]

- Be sure to read the "Cautions"
- Some parts of this product are made of plastic.

[Recommended Screws]

- M4 binding head screw or M4 truss head screw

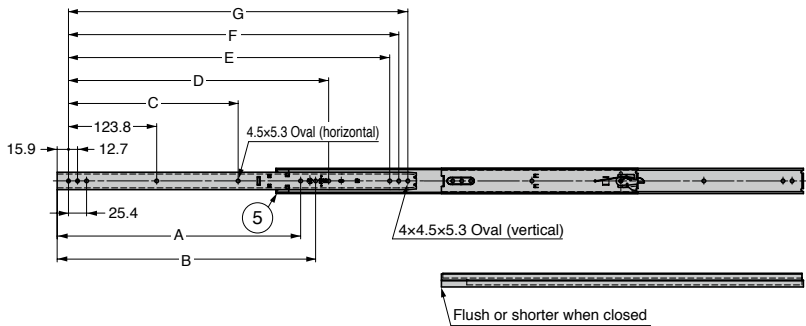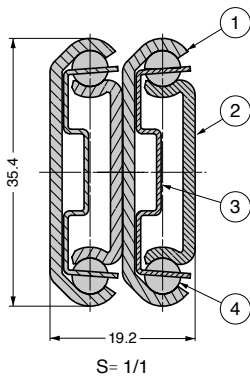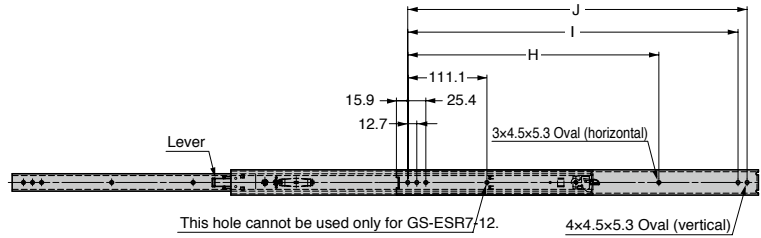

For mounting holes of inner and outer members, the first and second from both ends are vertical oval holes. The rest are horizontal oval holes.

No.	Part Name	Material	Finish / Colour
①	Outer Member	Stainless Steel (SUS304)	Plain
②	Inner Member		
③	Retainer		
④	Balls		
⑤	Guide	POM	White

Sold by piece.

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	I	J	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pc)
GS-ESR7-12	304.8	336	228	248.4				260.3	273		260.3	273	623	63.5	0.62
GS-ESR7-14	355.6	386.8	278.8	299.2				311.1	323.8		311.1	323.8	586	59.8	0.73
GS-ESR7-16	406.4	437.6	291.5	311.9			349.2	361.9	374.6	250.8	361.9	374.6	555	56.6	0.84
GS-ESR7-18	457.2	488.4	316.9	337.3	212.7		400	412.7	425.4	301.6	412.7	425.4	516	52.6	0.94
GS-ESR7-20	508	539.2	342.3	362.7	238.1		450.8	463.5	476.2	352.4	463.5	476.2	476	48.5	1.06
GS-ESR7-22	558.8	590	367.7	388.1	263.5	415.9	501.6	514.3	527	403.2	514.3	527	444	45.3	1.17
GS-ESR7-24	609.6	640.8	393.1	413.5	288.9	466.7	552.4	565.1	577.8	454	565.1	577.8	413	42.1	1.27
GS-ESR7-26	660.4	691.6	418.5	438.9	314.3	517.5	603.2	615.9	628.6	504.8	615.9	628.6	383	39	1.38
GS-ESR7-28	711.2	742.4	443.9	464.3	339.7	568.3	654	666.7	679.4	555.6	666.7	679.4	355	36.2	1.49