

# FULL EXTENSION SLIDE GS-SNS35D

**LOAD CAPACITY** 441~588 N/pair

**L=R SUS**




- Full extension (3 members).

**[Remarks]**

- Be sure to read the "Cautions"

**[Recommended Screws]**

- M4 pan head screw or nominal 4 pan head tapping screw

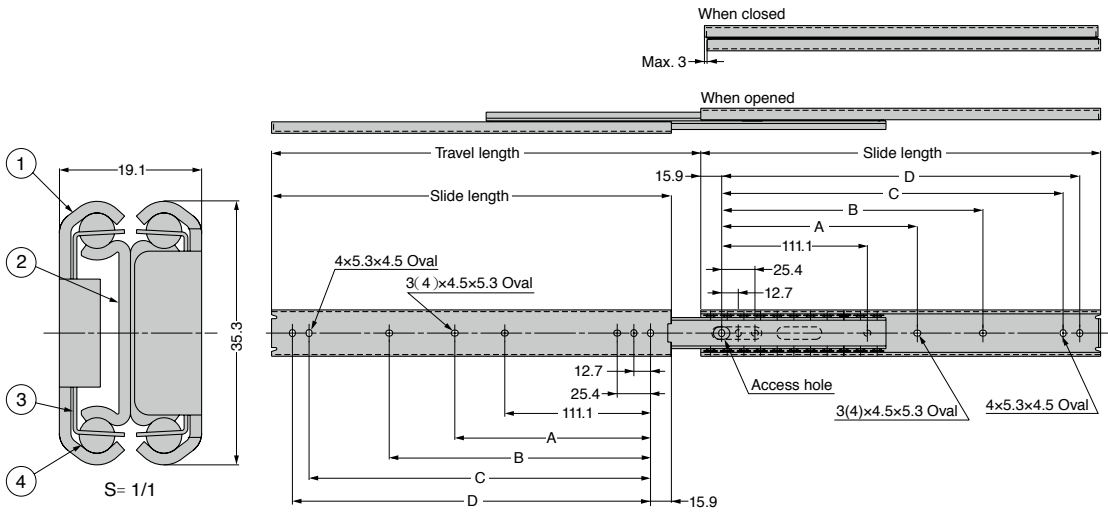

No.	Part Name	Material	Finish
①	Outer Member	Stainless Steel (SUS304)	Plain
②	Inner Member		
③	Retainer	Stainless Steel (SUS440)	-
④	Balls		

Sold by piece.

Item Name	Slide Length	Travel Length	A	B	C	D	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pc)
GS-SNS35D-30	304.8	327.2	-	149.2	260.3	273	588	60	0.62
GS-SNS35D-35	355.6	377.9		200	311.1	323.8	579	59	0.72
GS-SNS35D-40	406.4	428.7		250.8	361.9	374.6	559	57	0.82
GS-SNS35D-45	457.2	479.5	212.7	301.6	412.7	425.4	549	56	0.92
GS-SNS35D-50	508	530.3	238.1	352.4	463.5	476.2	530	54	1.03
GS-SNS35D-55	558.8	580.3	263.5	403.2	514.3	527	500	51	1.13
GS-SNS35D-60	609.6	631.9	288.9	454	565.1	577.8	481	49	1.23
GS-SNS35D-65	660.4	682.7	314.3	504.8	615.9	628.6	461	47	1.33
GS-SNS35D-70	711.2	733.5	339.7	555.6	666.7	679.4	441	45	1.43