# 3/4 EXTENSION SLIDE GS-SNS35S

LOAD CAPACITY 245~481 N/pair | L=R | SUS

●3/4 extension (2 members).

**[Remarks]**

●Be sure to read the “Cautions”

**[Recommended Screws]**

●M4 pan head screw or nominal 4 pan head tapping screw

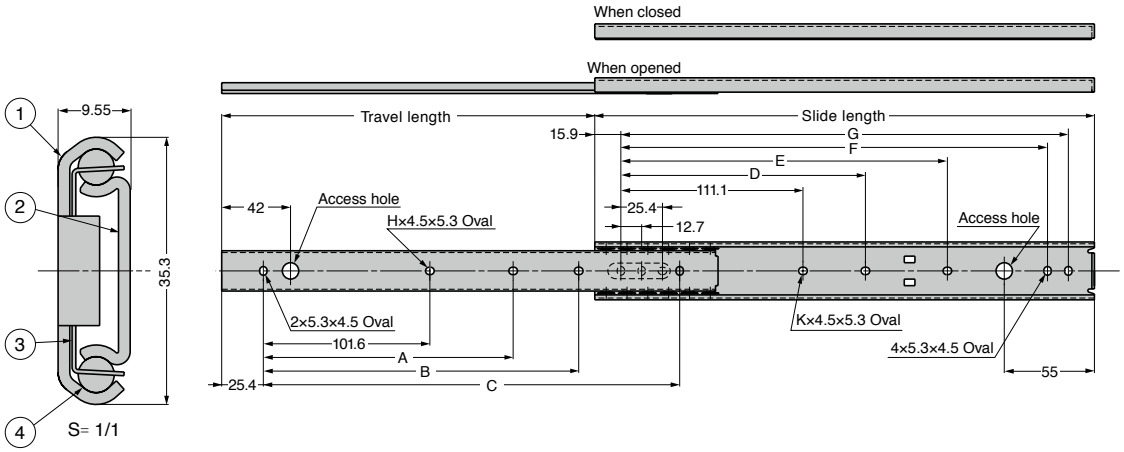


| No. | Part Name | Material | Finish |
|---|---|---|---|
| ① | Outer Member | Stainless Steel (SUS304) | Plain |
| ② | Inner Member | | |
| ③ | Retainer | | |
| ④ | Balls | Stainless Steel (SUS440) | – |

Sold by piece.

| Item Name | Slide Length | Travel Length | A | B | C | D | E | F | G | H | K | Load Capacity N/pair | Load Capacity kgf/pair | Weight (kg/pc) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| GS-SNS35S-30 | 304.8 | 228.6 | | 152.4 | 254 | | 149.2 | 260.3 | 273 | | | 481 | 49 | 0.31 |
| GS-SNS35S-35 | 355.6 | 279.4 | – | 203.2 | 304.8 | – | 200 | 311.1 | 323.8 | 2 | 3 | 461 | 47 | 0.36 |
| GS-SNS35S-40 | 406.4 | 304.8 | | 254 | 355.6 | | 250.8 | 361.9 | 374.6 | | | 422 | 43 | 0.41 |
| GS-SNS35S-45 | 457.2 | 330.2 | 203.2 | 304.8 | 406.4 | 212.7 | 301.6 | 412.7 | 425.4 | | | 402 | 41 | 0.46 |
| GS-SNS35S-50 | 508 | 381 | 228.6 | 355.6 | 457.2 | 238.1 | 352.4 | 463.5 | 476.2 | | | 363 | 37 | 0.51 |
| GS-SNS35S-55 | 558.8 | 406.4 | 254 | 406.4 | 508 | 263.5 | 403.2 | 514.3 | 527 | 3 | 4 | 333 | 34 | 0.56 |
| GS-SNS35S-60 | 609.6 | 431.8 | 279.4 | 457.2 | 558.8 | 288.9 | 454 | 565.1 | 577.8 | | | 294 | 30 | 0.61 |
| GS-SNS35S-65 | 660.4 | 482.6 | 304.8 | 508 | 609.6 | 314.3 | 504.8 | 615.9 | 628.6 | | | 265 | 27 | 0.66 |
| GS-SNS35S-70 | 711.2 | 508 | 330.2 | 558.8 | 660.4 | 339.7 | 555.6 | 666.7 | 679.4 | | | 245 | 25 | 0.71 |