

FULL EXTENSION SLIDE GS-273SL

LOAD CAPACITY 118~177 N/pair

L=R

DETACH


SUS



- Full extension (3 members).
- The drawer is detachable by lifting the disconnecting lever.

[Remarks]

- Be sure to read the "Cautions"
- Polyamide is used inside the slide.
- Noted that contact noise may be produced when the disconnecting lever passes over the leaf spring on the outer member.

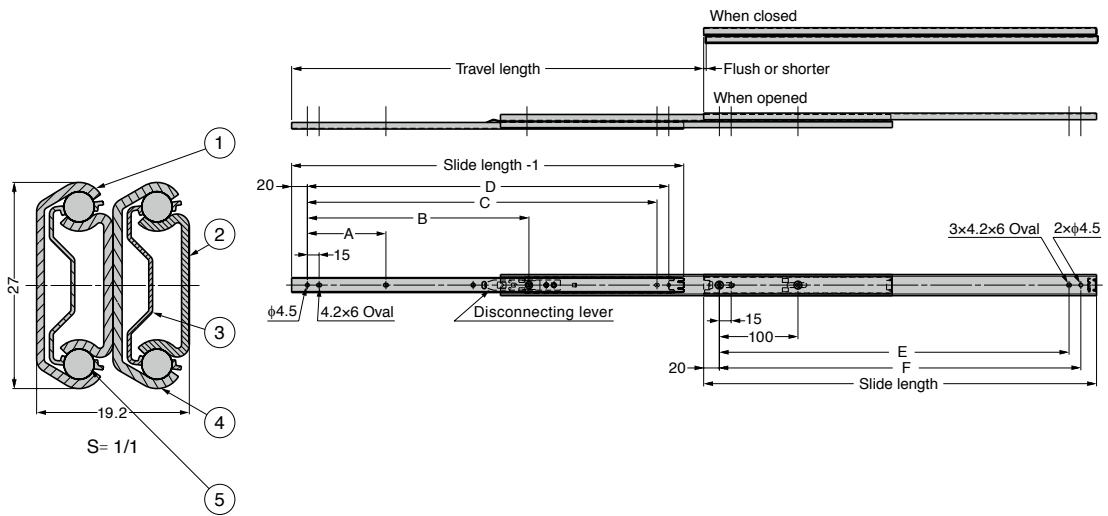

No.	Part Name	Material	Finish
①	Outer Member	Stainless Steel (SUS304)	Plain
②	Inner Member		
③	Retainer		
④	Intermediate Member		
⑤	Balls		-

Sold in pairs (2pcs).

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pc)
GS-273SL-200	200	221	-	135	-	-	145	160	177	18	0.6
GS-273SL-250	250	280		143.5	195	210	195	210	167	17	0.7
GS-273SL-300	300	327		188	245	260	245	260	157	16	0.8
GS-273SL-350	350	376		211.5	295	310	295	310	147	15	1
GS-273SL-400	400	426	100	236	345	360	345	360	137	14	1.1
GS-273SL-450	450	478		261.5	395	410	395	410	128	13	1.2
GS-273SL-500	500	524		282	445	460	445	460	118	12	1.4