

3/4 EXTENSION SLIDE GS-ESR2021

LOAD CAPACITY 108~157 N/pair

L=R **SUS**



● 3/4 extension (2 members).

[Others]


- When fixing the mounting hole ①, move the inner member backwards and use access hole "e".
- When fixing the mounting hole ③ for slides above 450mm, move the inner member backwards and use access hole "d".
- Mounting hole ② is unnecessary in normal installation.

[Remarks]

- Be sure to read the "Cautions"

[Recommended Screws]

- M3 screw with binding or truss head

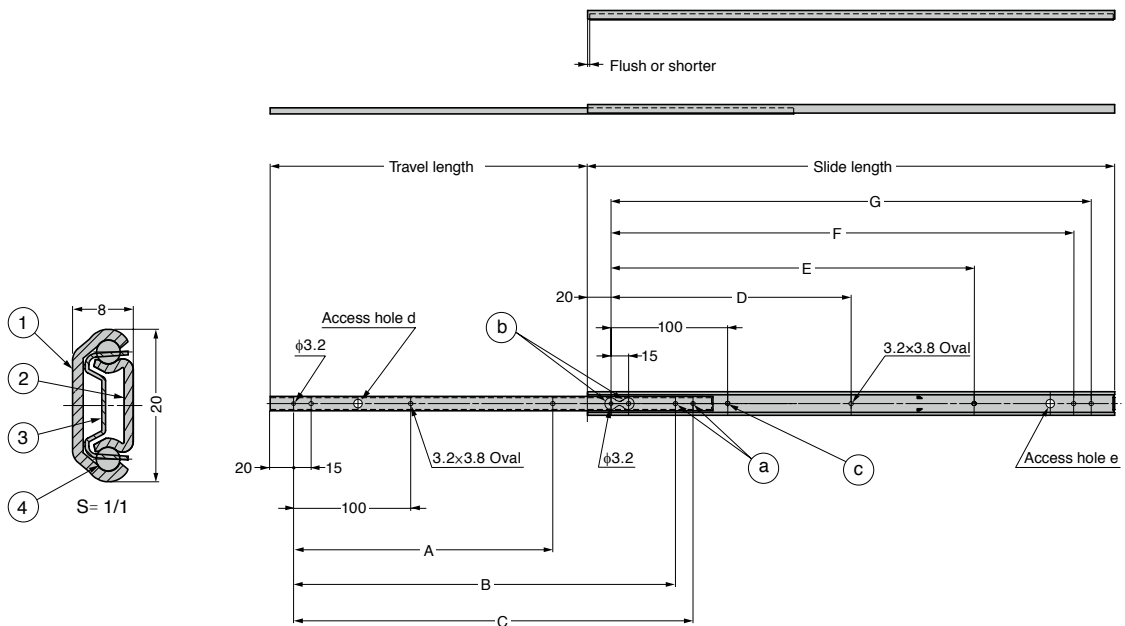

No.	Part Name	Material	Finish
①	Outer Member	Stainless Steel (SUS304)	Plain
②	Inner Member		
③	Retainer		
④	Balls		-

Sold by piece.

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pc)
GS-ESR2021-200	200	134	-	145	160			145	160	127	13	0.10
GS-ESR2021-250	250	184	150	195	210			195	210	147	15	0.13
GS-ESR2021-300	300	224	190	245	260			160	245	260	16	0.15
※ GS-ESR2021-350	350	244	225	295	310			210	295	310	15	0.18
GS-ESR2021-400	400	294	265	345	360			260	345	360	15	0.20
GS-ESR2021-450	450	334	300	395	410	205	310	395	410	127	13	0.23
GS-ESR2021-500	500	384	337	445	460	230	360	445	460	108	11	0.25

※:From the next production lot, A=190.