

FULL EXTENSION SOFT-CLOSE SLIDE GS-L52145

LOAD CAPACITY 540 N/pair

L=R

DETACH

CATCH



- Full extension (3 members).
- Soft-closes at 50mm distance from closed position.
- With self & soft closing mechanism built-in, easy to install as with conventional slides.
- Travel length is slide length – 50mm (approx.).
- Larger load capacity compared with our company's other products with the same mechanism.
- The drawer is detachable by lifting the lever.


[Remarks]

- Be sure to read the "Cautions"
- Do not push with a strong force when soft-closing mechanism is operating. Otherwise, it may cause oil leakage.


[Recommended Screws]

- For outer member
Oval hole: M4 or nominal 4 screw
Round hole: M5 or nominal 5 low head screw
- For inner member
M4 or nominal 4 low head screw


[Self & Soft Closing]

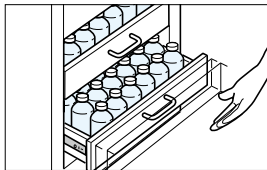


[Full Extension (3 Members)]



[Easy to Detach]

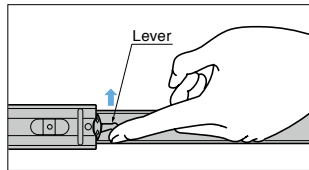

Simultaneously move the left lever upwards and the right lever downwards.

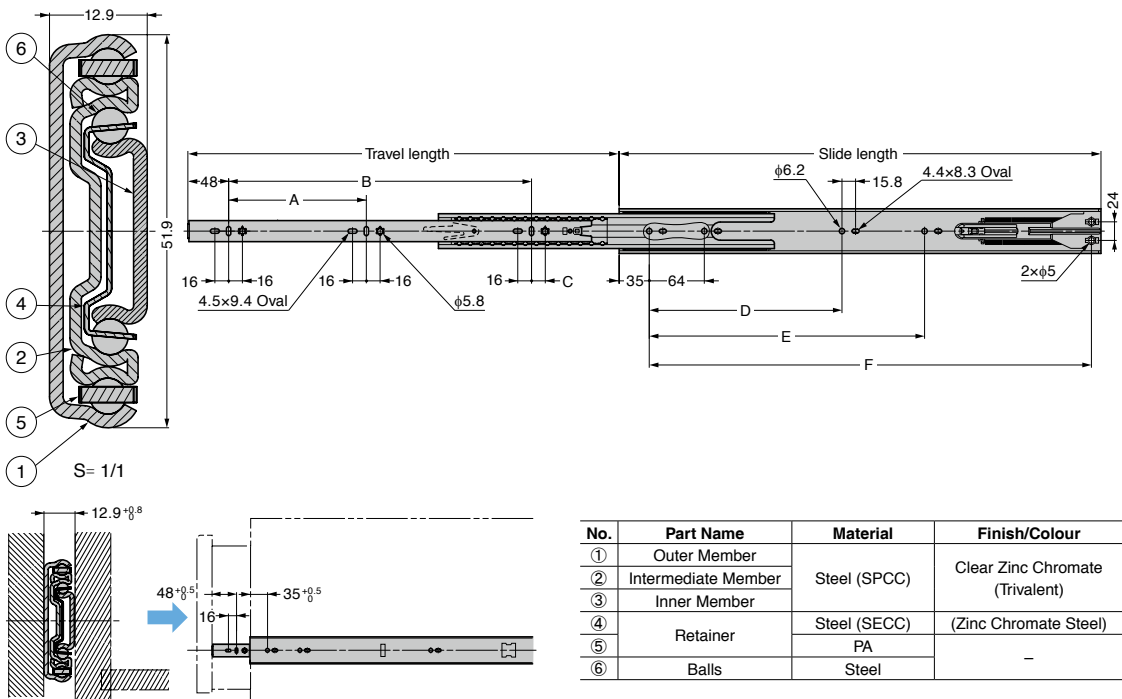

No.	Part Name	Material	Finish/Colour
①	Outer Member	Steel (SPCC)	Clear Zinc Chromate (Trivalent)
②	Intermediate Member		
③	Inner Member		
④	Retainer	Steel (SECC)	(Zinc Chromate Steel)
⑤		PA	
⑥	Balls	Steel	-

Sold in pairs (2 pcs).

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pair)
GS-L52145-410	410	360	96	224	-	160	-	362.5	540	55	1.6
GS-L52145-460	460	403		256		224	-	412.5			
GS-L52145-510	510	453	128	288		256		462.5			
GS-L52145-560	560	502	160	352	16		320	512.5			
GS-L52145-610	610	552	192	384			352	562.5			
GS-L52145-660	660	604		416		224		612.5			
GS-L52145-710	710	651	224	480		416		662.5			