

FULL EXTENSION SOFT-CLOSE SLIDE GS-4670 Black

LOAD CAPACITY

147-392 N/pair

L=R

DETACH

BUMPER


CATCH

INSTRUCTION




- Full extension (3 members).
- Black version of slide GS-4670
- Soft-closes at 20mm distance from closed position (slide length 350mm or below) or 36mm distance from closed position (slide length 400mm or above).
- With self & soft closing mechanism built-in, easy to install as with conventional slides.
- The drawer can be fully pulled out for slide length 350mm or above.
- The maximum width of the drawer is the slide length +200mm.
- Sliding smoothly even with some deflection of cabinet due to shock absorbing effect of the outer member installation part.
- The drawer is detachable by lifting the lever.

[Self & Soft Closing]

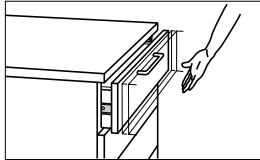

[Full Extension (3 Members)]

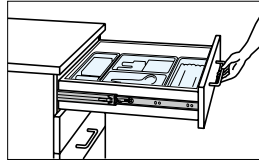


[Remarks]

- Be sure to read the "Cautions"
- Do not push with a strong force when soft-closing mechanism is operating. Otherwise, it may cause oil leakage.
- Noted that scratch is conspicuous on black surface.



[Parts Included]

- Truss head tapping screw 4x12 (black chromate)

[Easy to Detach]

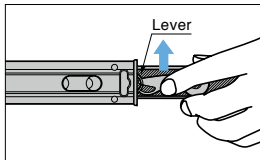

Simultaneously move the left lever upwards and the right lever downwards.

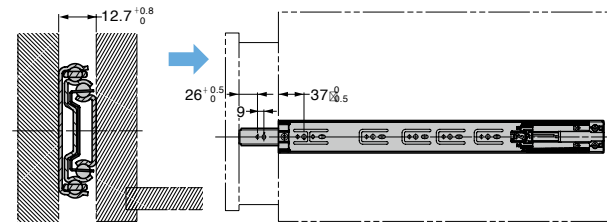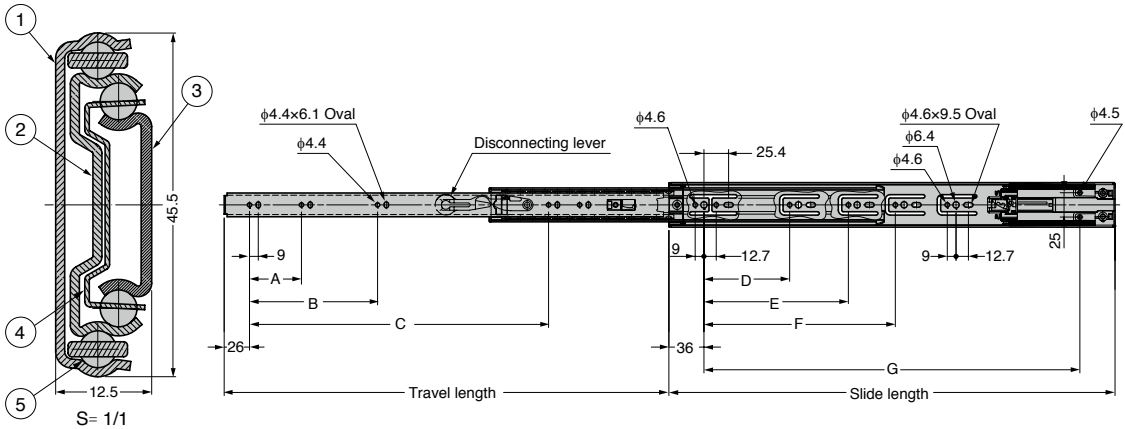

No.	Part Name	Material	Finish/Colour
①	Outer Member	Steel	Black
②	Intermediate Member		Electrodeposition
③	Inner Member		(Zinc Chromate Steel)
④	Retainer		
⑤	Balls		-

Sold in pairs (2 pcs).

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pair)
GS-4670-250BL	250	175	-	-	124	87	-	-	179	147	15	0.71
GS-4670-300BL	300	275	-	-	174	-	-	-	229	196	20	0.85
GS-4670-350BL	350	353	96	-	224	-	183	-	279	245	25	0.99
GS-4670-400BL	400	404	96	-	254	-	199	-	329	294	30	1.13
GS-4670-450BL	450	455	128	-	294	119	247	-	379	294	30	1.27
GS-4670-500BL	500	505	96	160	344	-	295	-	429	343	35	1.44
GS-4670-550BL	550	556	96	160	394	-	343	-	479	392	40	1.59
GS-4670-600BL	600	606	128	192	444	-	215	343	529	294	30	1.77