

FULL EXTENSION SOFT-CLOSE SLIDE GS-ESR4670 Stainless steel

LOAD CAPACITY 157-343 N

L=R DETACH

HOLD CLOSED



CATCH

INSTRUCTION

SUS



● Slide cross section S=1/1

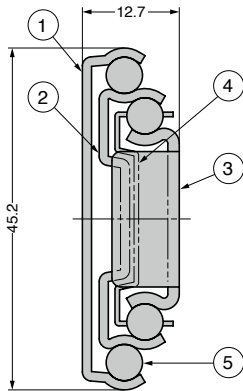

- Soft-closes at 20mm distance from closed position (slide length 350mm or below) or 36mm distance from closed position (slide length 400mm or above).
- With self & soft closing mechanism built-in, possible to install as with conventional slides.
- Full extension (3 members).
- The drawer is detachable by lifting the lever.
- The maximum width of the drawer is the slide length + 200mm.


[Remarks]

- Be sure to read the "Cautions"
- Some parts of this product are made of plastic.
- Do not push with a strong force when soft-closing mechanism is operating. Otherwise, it may cause oil leakage.


[Recommended Screws]

- For metal: M4 screw (except for countersunk head)
- For wood: M4 tapping screw (except for countersunk head)

[Easy to Detach]

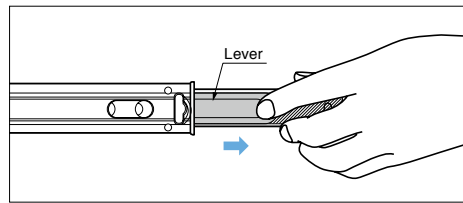

The drawer can be detached by pulling the lever in the direction of the arrow.

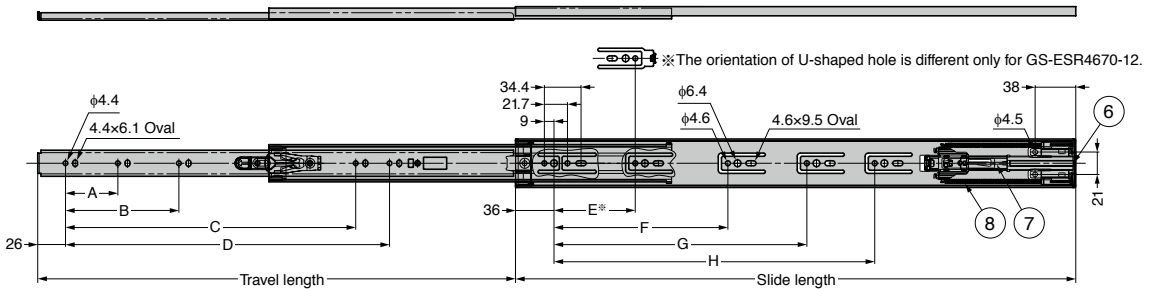

No.	Part Name	Material
①	Outer Member	Stainless Steel (SUS304)
②	Intermediate Member	
③	Inner Member	
④	Retainer	
⑤	Balls	
⑥	Damper Case	POM
⑦	Shaft	Stainless Steel (SUS303)
⑧	Spring	Stainless Steel (SUS304)

Sold in pairs (2 pcs).

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	Load Capacity N/pair	Load Capacity kg/pair	Weight (kg/pair)
GS-ESR4670-12	300	265	-	-	-	174	145	-	-	-	157	16	0.78
GS-ESR4670-14	350	340	-	-	-	224	151	-	-	-			-
GS-ESR4670-16	400	400	96	-	-	256	167	-	-	-	196	20	1.07
GS-ESR4670-18	450	450	128	-	-	306	-	215	-	-			294
GS-ESR4670-20	500	500	96	160	-	344	119	279	-	-	343	35	
GS-ESR4670-22	550	550				394		215					311
GS-ESR4670-24	600	600	192	444	247	375	1.66						
GS-ESR4670-26	650	650	128	224	416	494	311	407	1.81				
GS-ESR4670-28	700	700			480	544	215	343	471	1.96			