

# FULL EXTENSION SOFT-CLOSE SLIDE GS-3670

**LOAD CAPACITY**

147-196 N/pair

**L=R**

**DETACH**

**BUMPER**


**CATCH**

**INSTRUCTION**




- Full extension (3 members).
- The drawer can be fully pulled out for slide length 300mm or above.
- Soft-closes at 20mm distance from closed position (slide length 350mm or below) or 36mm distance from closed position (slide length 400mm or above).
- The maximum width of the drawer is the slide length + 200mm.
- Sliding smoothly even with some deflection of cabinet due to shock absorbing effect of the outer member installation part.
- The drawer is detachable by lifting the lever.
- Type 4670 with slide width 45.5mm, load capacity 15~40kgf / pair (black chromate: , clear zinc chromate ) also available.

**[Self & Soft Closing]**



**[Full Extension (3 Members)]**





**[Remarks]**

- Be sure to read the "Cautions"
- Gap between drawer and cabinet beyond the range ※1 in the drawing below may cause unexpected damage to the slide.
- Do not push with a strong force when soft-closing mechanism is operating. Otherwise, it may cause oil leakage.

**[Parts Included]**




- Truss head tapping screw 4x12

**[Easy to Detach]**



Simultaneously move the left lever upwards and the right lever downwards.

Move the left and right levers towards you at the same time.

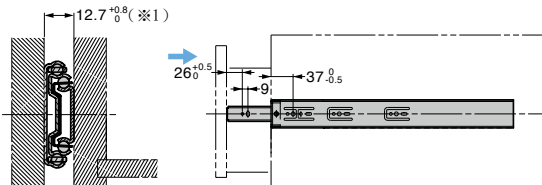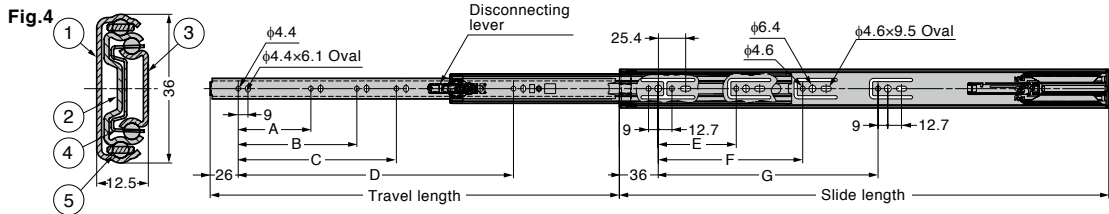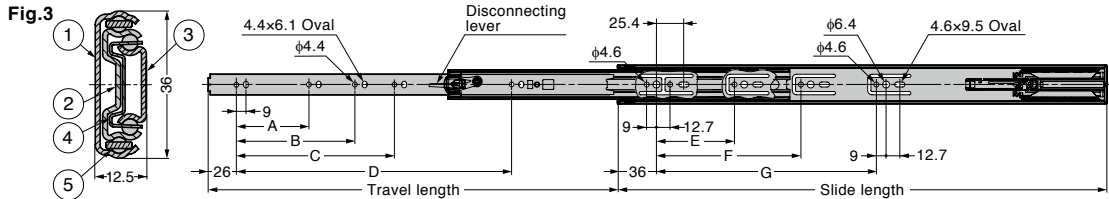

No.	Part Name	Material	Finish/Colour
①	Outer Member	Steel	Clear Zinc Chromate (Trivalent)
②	Intermediate Member		
③	Inner Member		
④	Retainer		(Zinc Chromate Steel)
⑤	Balls		-

Sold in pairs (2 pcs).

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pair)
GS-3670-250	250	200	124	-	-	-	87	-	-	147	15	0.54
GS-3670-300	300	300	174	-	-	-	-	-	183			0.66
GS-3670-350	350	350	96	224	-	-	-	-	199			0.78
GS-3670-400	400	400	160	256	-	-	-	-	247	196	20	0.9
GS-3670-450	450	450	96	192	306	-	119	247	295			1.02
GS-3670-500	500	500	-	-	356	-	-	-	215			1.12
GS-3670-550	550	550	128	224	352	406	-	-	343			1.24
GS-3670-600	600	600	-	-	384	456	-	-	247			375

※ As soon as the stock of this product runs out, the slide detaching method is changed from Fig.1 to Fig.2, and the drawing is changed from Fig.3 to Fig.4.