



LID STAY GS-S-16



[Installation] Right-handed




Opening Direction	Description
 Top-opening	—

[Remarks]

- When closing the door, operate while pulling the centre rivet (※ in left figure) toward you.
- When installing this stay to sheet metal, be sure to perform thread relief processing (chamfering) on the mounting surface side (cabinet side). In this way, screw head will not protrude when the stay is fixed.

No.	Part Name	Material	Finish
①	Body	Steel (SPCC)	Chrome
②	Mounting Plate		
③	Bracket	Brass	Tin Cobalt Plating
④	Centre Shaft		
⑤	Shaft	PA	Natural
⑥	Washer A		
⑦	Washer B		

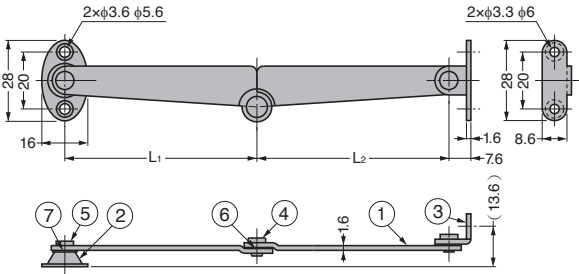

Left-handed type shown.

Item Name	Type	L ₁	L ₂	Tension Force N/pc	Tension Force kgf/pc	Weight (g)
GS-S-16R	Right-handed	67	67	336	34.3	31
GS-S-16L	Left-handed					