



# LID STAY GS-S-20 With Catch



## [Installation] Right-handed




Opening Direction	Description
 <p>Top-opening</p>	With Catch

## [Remarks]

- Catch mechanism may not work, depending on door weight.
- When installing this stay to sheet metal, be sure to perform thread relief processing (chamfering) on the mounting surface side (cabinet side). In this way, screw head will not protrude when the stay is fixed.

No.	Part Name	Material	Finish
①	Body A	Steel (SPCC)	Chrome
②	Body B		
③	Spring A	Steel (SK)	-
④	Spring B		
⑤	Ball	Steel (SWRCH)	-
⑥	Bracket	Steel (SPCC)	Chrome
⑦	Bracket		
⑧	Washer		Nickel
⑨	Washer	PA	-
⑩	Centre Shaft	Steel (SWRM)	Chrome
⑪	Shaft	Brass	Tin Cobalt Plating

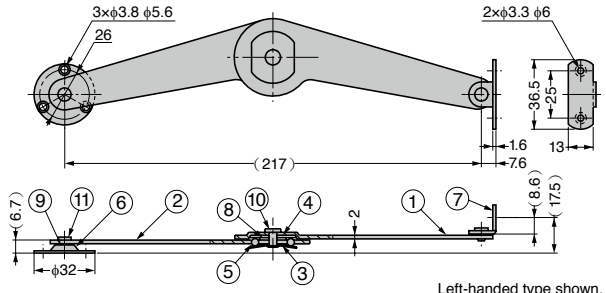

Item Name	Type	Tension Force N/pc	Tension Force kgf/pc	Weight (g)
GS-S-20R	Right-handed	410	41.8	122
GS-S-20L	Left-handed			