


LID STAY GS-KLS



[Installation] With single knuckle hinge

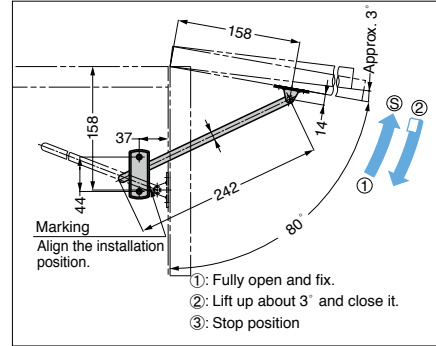


Opening Direction	Description
 Upward-opening	Stops When Fully Opened, Right-handed Only

- Holds the door in fully opened position. Lift up the door to release the stopper.
- Easy installation with a marking on the body for indicating installation position.

[Remarks]

- Right side installation only.
- Max. door height is 300mm.
- Height more than 300mm or applying force to the front end may cause deformation and damage.

No.	Part Name	Material	Finish/Colour
①	Body	PA	White
②	Arm	Steel (SS)	Nickel
③	Bracket	Steel (SPCC)	
④	Spring	Steel	-

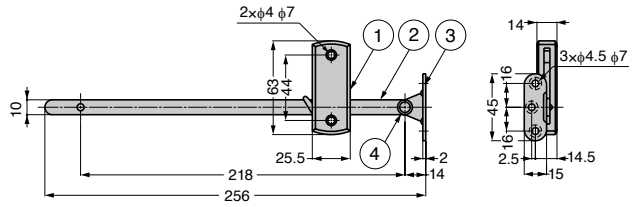

Item Name	Door Weight kg/pc	Weight (g)
GS-KLS	Max. 8	85