
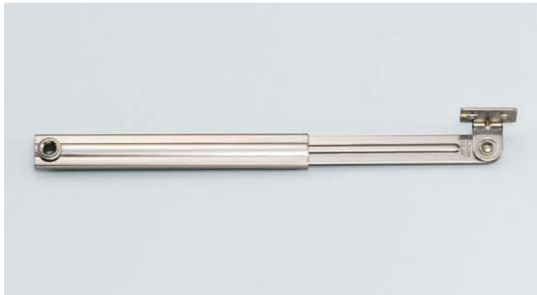


LOW PROFILE LID STAY GS-L-200P

TEST METHOD 16 L=R SUS




Opening Direction	Description	Non-handed	Qty	Compression Load
	Holds When Fully Opened	Yes	1 Units Per Door	147 N/pc (15 kgf/pc)
Upward-opening※				

※ Can also be used for top-opening lid, depending on installation conditions. Please confirm with actual item in detail.


- Holds the lid in fully opened position. Slightly lift up the lid to release stopper.
- Can be installed in a small space due to compact design.
- Used for opening and closing of device or door.

[Installation]

Without bracket

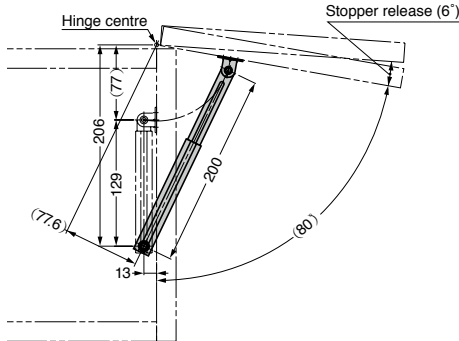

With bracket

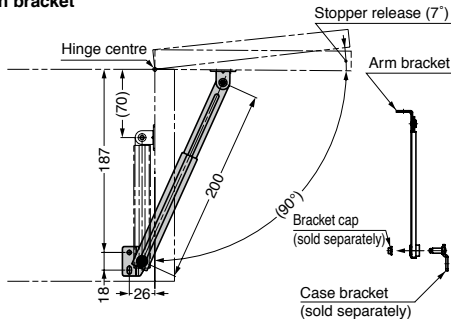


[Remarks]


- Do not use this product as a stopper.
- Allow room for stroke when installing.
- Securely fix the mounting screws with screw adhesive.
- Use 1 pc for 1 door.
- Opening angle and installation position change depending on the position of hinge centre. Determine the installation position based on the hinges used and cabinet shape.
- For wooden door, use BRACKET GS-L-200P-BT (sold separately)
- Calculate suitable door size with reference to LID STAY List

[Sold Separately]

- Mounting bracket GS-L-200P-BT

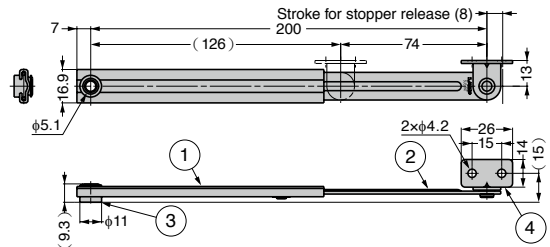


[Stopper Release]



No.	Part Name	Material	Finish
①	Body	Stainless Steel (SUS304)	Barrel
②	Arm	Stainless Steel (SUS304)	Polished
③	Case Bracket	Stainless Steel (SUS304)	-
④	Arm Bracket (Plate)	Stainless Steel (SUS304)	Polished

Item Name	Compression Load N/pc	Compression Load kgf/pc	Weight (g)
GS-L-200P	147	15	68

BRACKET GS-L-200P-BT For GS-L-200P



- Bracket for GS-L-200P
- One-touch installation with the bracket cap.
- Refer to GS-L-200P for installation details.

[Remarks]

- For GS-L-200P only.
- Do not apply excessive force in the direction of removing the cap.

Item Name	Weight (g)
GS-L-200P-BT	14

No.	Part Name	Material	Finish/Colour
①	Case Bracket	Stainless Steel (SUS304)	Barrel Polished
②	Shaft of Case Bracket	Stainless Steel (SUS303)	Plain
③	Bracket Cap	POM	Black