



ADJUSTABLE SOFT-DOWN STAY GS-NSD



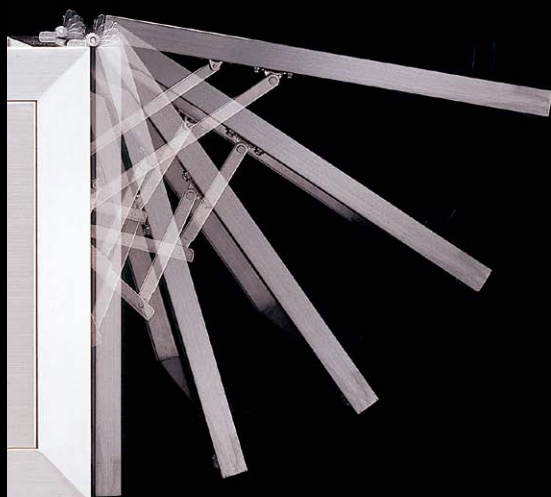


- Keeps flap/lid from slamming shut.
- Successfully passed for 30,000 open/close private cycle tests.
- Opening/closing speed is adjustable.
- Opening angle is adjustable by changing mounting position.
- Handed.

[Remarks]

Designed to operate at room temperature 0°~40°C.

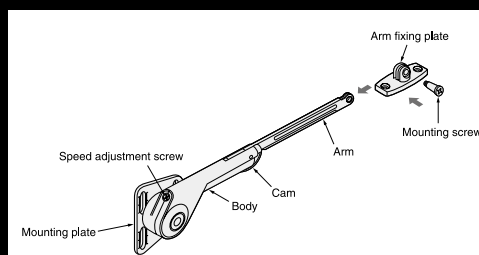



APPLICATION		MOUNTING SIDE	GS-NSD-#
Downward-Opening Flap		Right	GS-NSD-10R
		Left	GS-NSD-10L
Top-Opening Flap		Right	GS-NSD-20R
		Left	GS-NSD-20L
Upward-Opening Flap		Right	GS-NSD-35R
		Left	GS-NSD-35L

ADJUSTABLE SOFT-DOWN STAY GS-NSD-10




- For downward-opening flap door with piano, butt or drop Hinges.
- NSD-10 is designed to hold door in closed position.
- Torque Calculation :
Torque = Door Height x 1/2 x Door Weight.
Per Piece : 20~70 kg·cm.
Per Pair : 40~140 kg·cm.

Material	Finish
Zinc Alloy, Steel	Bright Nickel

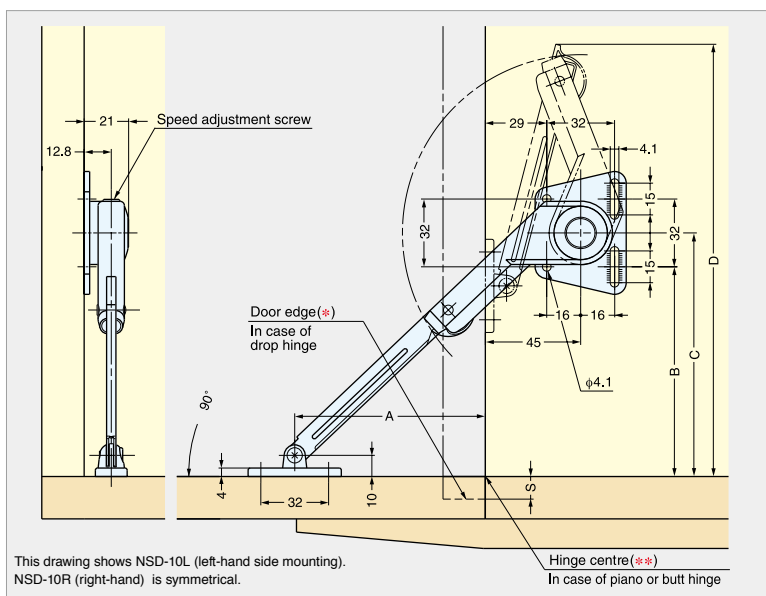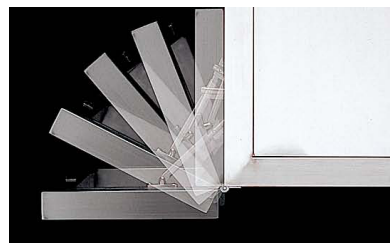

The distance for A, B, C is measured from "door edge (*)" and "top surface of bottom board" when drop hinges are used, and from "hinge centre (**)" and "top surface of bottom board" when piano or butt hinges are used.



Hinge Type	A	B	C	D
Drop Hinge	97	106-S	122-S	211-S
Piano / Butt Hinge	90	99	115	204

Note: "S" dimension is the overlay distance for drop hinge(s).

Item Name	Weight (g)
GS-NSD-10R	210
GS-NSD-10L	210