

LIFT-OFF HINGE GS-SKH




[Applications]


- Control board, various enclosures

[Remarks]

- Load capacity is the value when using two hinges. For calculation conditions, please refer to INDEX

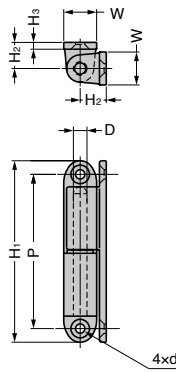

GS-SKH-S

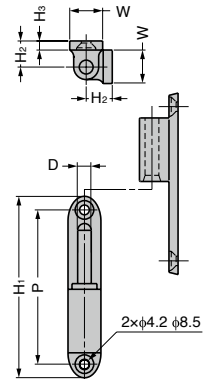

GS-SKH-CR

Item Name	Material	Finish	H ₁	H ₂	H ₃	W	P	D	d	Load Capacity N/2 pcs	Load Capacity kgf/2 pcs	Weight (g)
GS-SKH-51S	Stainless Steel (SUS304)	Barrel Polished	51	8	2.5	11	40	4	Counterbore for M3	78	8	30
GS-SKH-60S			60	9.5	3	13	48	5	Counterbore for M4	118	12	50
GS-SKH-80S			80	11.5	4.5	14.5	68	6		284	29	95