

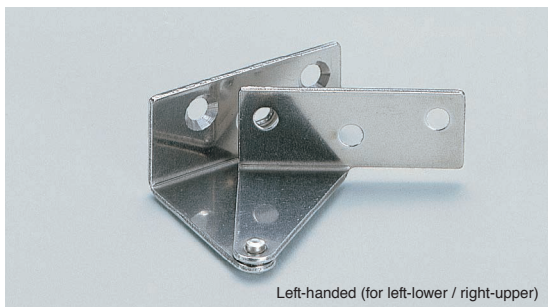


PIVOT HINGE GS-WP1, GS-WP3 For Overlay Door







[Remarks]

- Recommended for use in pairs.
- Dimensions in () is for GS-WP3.

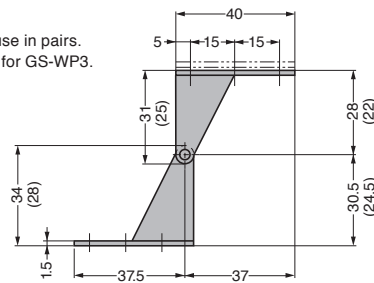

[Processing on metal sheet]

When M3 screws are used.

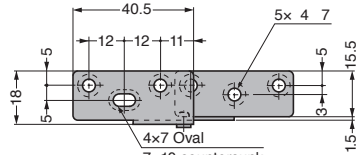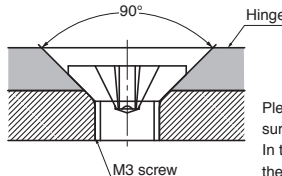

Left-handed type.

Please be sure to chamfer the mounting surface for screws and rivets. In this way, screw head will not project when the body is fixed.

Item Name	Type	Material	Finish	Door Width	Door Height	Door Thickness	Door Weight kg/set	Weight (g)
GS-WP1R	Right-handed (for right-lower / left-upper)	Stainless Steel (SUS430)	Plain	Max. 300	Max. 700	Max. 24	Max. 1.8	23
GS-WP1L	Left-handed (for left-lower / right-upper)							
GS-WP3R	Right-handed (for right-lower / left-upper)	Stainless Steel (SUS430)	Plain	Max. 300	Max. 700	Max. 18	Max. 1.8	21
GS-WP3L	Left-handed (for left-lower / right-upper)							