

# SPRING HINGE GS-SH-C



● All parts made of stainless steel.


**[Remarks]**

● Load capacity is the value when using two hinges. For calculation conditions, please refer to INDEX



※When applying the torque given in the table below

No.	Part Name	Material	Finish
①	Body	Stainless Steel (SUS304)	Barrel Polished
②	Spring		-
③	Shaft		-

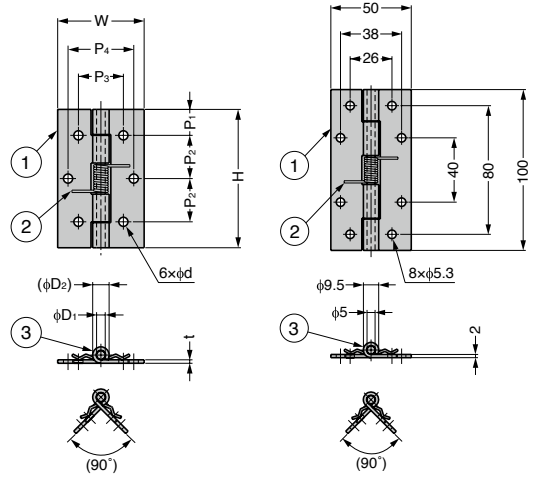

GS-SH-60C, GS-SH-80C

GS-SH-100C

Item Name	H	W	t	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	P <sub>4</sub>	D <sub>1</sub>	D <sub>2</sub>	d	Torque Moment cN·m	Torque Moment kgf·cm	Load Capacity N/2 pcs	Load Capacity kgf/2 pcs	Weight (g)
GS-SH-60C	60	40	1.5	10	20	26	26	5	8.5	4.3	27.8	2.83	88	9	44
GS-SH-80C	80	50	2	15	25	38	38	5	9.5	5.3	32.8	3.34	157	16	86
GS-SH-100C	Above Drawing	Above Drawing	Above Drawing	Above Drawing	Above Drawing	Above Drawing	Above Drawing	Above Drawing	Above Drawing	Above Drawing	97.7	9.96	196	20	110