


# GLASS DOOR HINGE (W/ CATCH) GS-GH-456C For Overlay Door

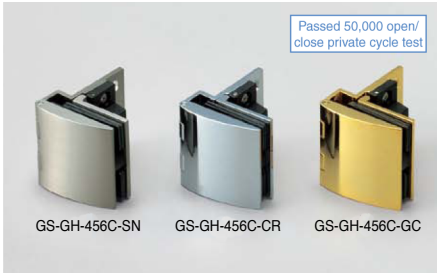

- Suitable for showcases and covers for machine.
- Mounting position adjustable: Vertically  $\pm 1$ mm, Horizontally  $\pm 1.2$ mm.
- Inset door hinge is also available.

### [Remarks]

- Load capacity is the value when using two hinges. For calculation conditions, please refer to INDEX


### [Recommended Screws]

- Size 4 truss head tapping screw or size 3.8 round head wood screw

### [Glass Thickness and Qty of Spacers]

Glass Thickness	5	6	8
Qty of Spacers	3	2	No Spacer

No.	Part Name	Material	Finish
①	Front Plate	Brass	SN: Satin Nickel
②	Fixing Plate C		CR: Chrome
③	Hinge Plate		GC: Gold
④	Shaft	Stainless Steel (SUS303)	Plain
⑤	Catch	—	Black
⑥	Striker	Zinc Alloy (ZDC)	—
⑦	Glass Adjustment Block	PA	Black
⑧	Pad C	PVC	
⑨	Pad D		
⑩	Spacer	PP	
⑪	Truss Head Screw	Stainless Steel	—
⑫	Spring Washer		
⑬	Truss Head Screw		
⑭	Truss Head Screw		

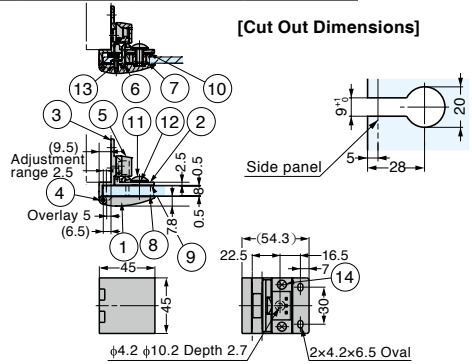

Item Name	Finish	Door Width	Door Height	Glass Thickness	Load Capacity N/2 pcs	Load Capacity kg/2 pcs	Weight (g)
GS-GH-456C-SN	Satin Nickel	Max. 600	Max. 1200	5, 6, 8	148	15	216
GS-GH-456C-CR	Chrome						216
GS-GH-456C-GC	Gold						216

※ Load capacity has priority over glass size.