

FULL EXTENSION PUSH-TO-OPEN SLIDE GS-4638

LOAD CAPACITY 265~441 N/pair

L=R

DETACH

HOLD OPENED



- Push-to-open mechanism. No handle or knobs required for a sleek, modern look.
- The drawer is easily opened by slightly pushing the front plate.
- With push-to-open mechanism built-in, easy to install as with conventional slides.
- Full extension (3 members).
- The drawer can be held in fully opened position. Release by pressing the front plate.
- The drawer is detachable by lifting the lever.
- High load capacity due to sequential mechanism.


[Remarks]

- Be sure to read the "Cautions"
- When the drawer is closed, pressing the front plate may unexpectedly open the drawer.
- Do not apply strong shock. Otherwise, the drawer may be opened unexpectedly.
- Do not pull the drawer strongly in closed position. Otherwise, the slide may be damaged.


[Recommended Screws]

- M4 round head screw, nominal 4 or M4 binding head screw, nominal 4 or M4 truss head screw.


[Push to Open]




[Full Extension (3 Members)]



[Easy to Detach]





The drawer can be detached by pulling the lever in the direction of the arrow.


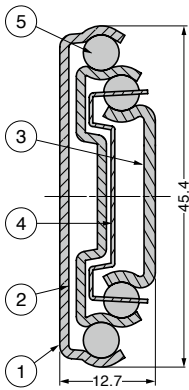


S = 1/1

Minimum cabinet depth = drawer length + 7 mm



Push effective area (area where the push-to-open mechanism works)

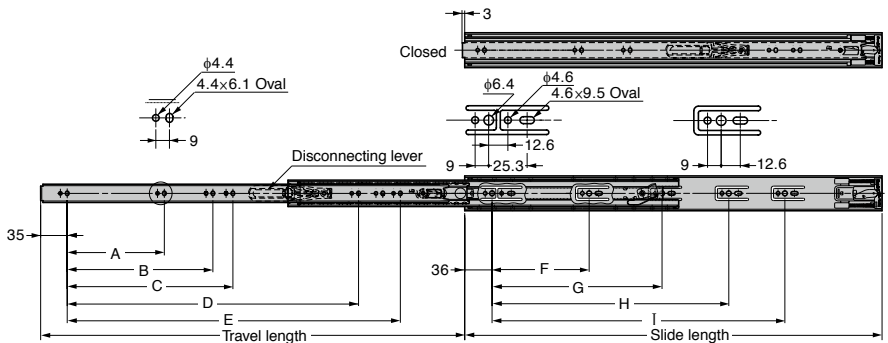

No.	Part Name	Material	Finish
①	Outer Member	Steel	Clear Zinc Chromate
②	Intermediate Member		
③	Inner Member		
④	Retainer		
⑤	Balls		

Sold in pairs (2 pcs).

Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	I	Max. Drawer Length		Load Capacity N/pair	Load Capacity kg/pair	Weight (kg/pair)
												W	K			
GS-4638-14	350	356	128	224	448	512	224	128	-	-	224	550	215	441	45	1
GS-4638-16	400	406					288	256	-	600	250	422	43	1.14		
GS-4638-18	450	457					320	-	320	650	280	392	40	1.28		
GS-4638-20	500	508					384	224	352	700	310	373	38	1.42		
GS-4638-22	550	559					192	416	320	750	340	353	36	1.56		
GS-4638-24	600	610					416	480	320	800	375	333	34	1.7		
GS-4638-26	650	660					512	128	-	850	405	304	31	1.84		
GS-4638-28	700	711					448	512	576	900	435	265	27	1.98		