


RoHS

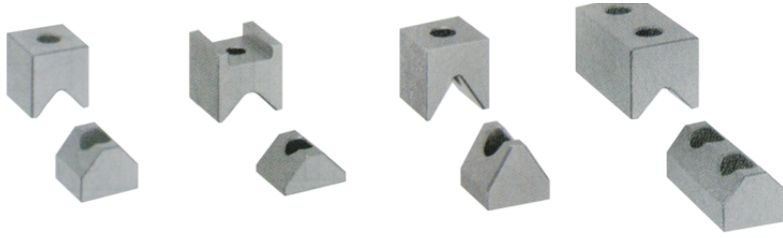

材質	硬度
S45C	42~45HRC

$\sqrt[25]{\left(\sqrt[1.6]{G}\right)^6}$

TYPE	一般型 EXBW,EXBW12E EXBW16E,EXBWP EXBWPB	附攻牙孔型 EXBWB EXBWPB	上部板支點型 EXBWT EXBWTB	V溝槽70度型 EXBWF	長型 EXBWD
安裝尺寸					
上部	 	 	 	 	
下部	 	 	 	 	

TYPE		T	L	L1	L2	A	H	d	R	M (粗螺紋)	庫存
一般型	EXBW	-	35	22	23	25	14	9	4	-	△
	EXBW12E		20	12	13	12	8	4.5	2		△
	EXBW16E		25	16	16	16	11	7	4		△
	EXBWP		25		19	25			4		△
	EXBWEP		17		20	2			△		
附攻牙孔型	EXBWB	35	22	23	25	14	9	4	M 8	△	
	EXBWPB	25	16	19		11	7		M 6	△	
上部 板支點型	EXBWT	12	35	20	26	20	9.5	5.5	2	-	△
		16		22	28	25	14	9	4		△
		19		25	14	22	20	9.5	5.5		2
	EXBWTP	16	24		25	11	7	4	△		
	19	△									
	V溝槽70度型	EXBWF	-	35	25	25	25	14	9		2
長型	EXBWD	-	35	22	23	25	14	9	4	△	

Sp. 特長

- 由於70度型的接面積大於90度型，最適合用在欲避免旋轉治具發生偏移情況時

訂貨： TYPE 交期： 3 天

EXBWT16

Ex. 使用例

- EXBW12E為配合板寬的精巧型定位塊

