


RoHS

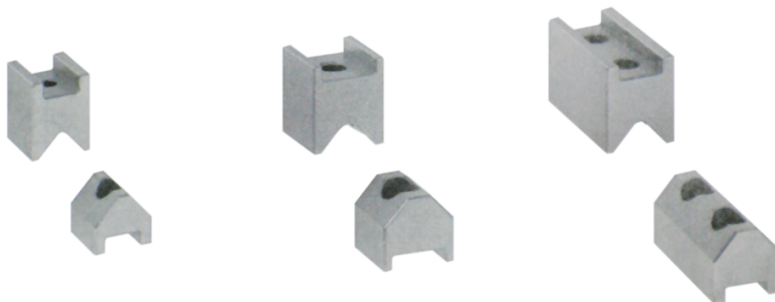

材質	硬度
S45C	42~45HRC

25 / (16<sup>G</sup>)

TYPE	一般型 EXBT EXBTP	附攻牙孔型 EXBTPB	長型 EXBTD
安裝尺寸			
上部	 	 	 
下部	 	 	 

TYPE		T	L	L <sub>1</sub>	L <sub>2</sub>	A	H	d	R	M (粗螺紋)	庫存
一般型	EXBT	12	35	25	26	20	9.5	5.5	2	-	△
		16		27	28	25	14	9	4		△
		19									△
	EXBTP	12	25	19	22	20	9.5	5.5	2		△
		16		21	24	25	11	7	4		△
		19									△
附攻牙孔型	EXBTPB	16	25	21	24	25	11	7	4	M 6	△
長型	EXBTD	12	35	25	26	20	9.5	5.5	2	-	△
		16		27	28	25	14	9	4		△
		19									△

**Ex.** 使用例

訂貨：  交期：  天

EXBT12

