


RoHS



材質	處理
S45C	染黑Fe ₃ O ₄

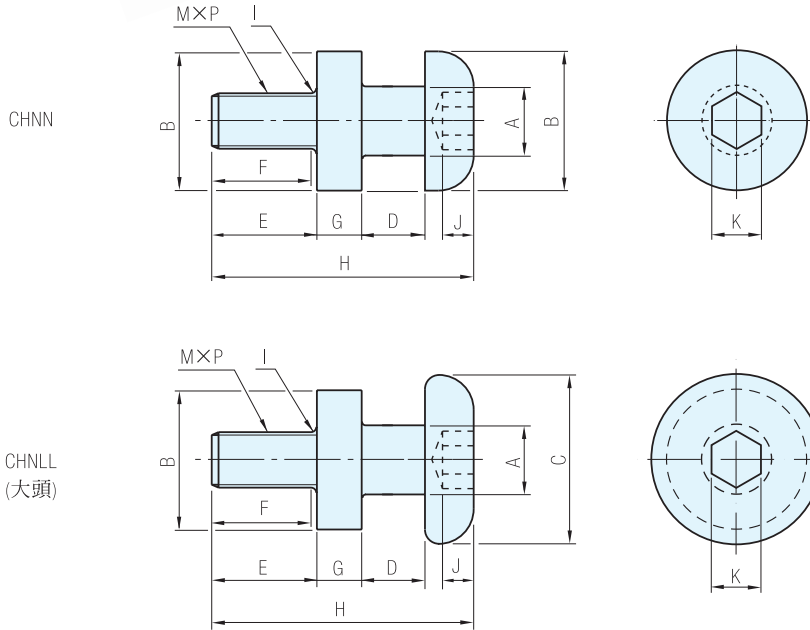


品號		N 鋼の場合 安全係數10	M×P	A	B	C	D		E	F	G	H		I	J	K	單價	
Type	M						CHNN	CHNLL				CHNN	CHNLL				CHNN	CHNLL
CHNN	10	2452	10×1.5	13	32	42	10	18	20	16	8	46	54	1.5	5	8	•	•
	12	3530	12×1.75	16	36	48	13	20	24	20	10	57	64	1.5	6	10	•	•
	16	6669	16×2.0	20	40	52	18	25	30	25	13	75	82	2.0	9	14	•	•
CHNLL (大頭)	20	10395	20×2.5	25	48	62	20	28	37	32	16	90	98	2.0	12	17	•	•
	24	15004	24×3.0	32	58	76	25	33	47	40	20	111	119	2.5	13	19	•	•
	30	23830	30×3.5	36	68	88	30	40	56	48	22	131	141	3.0	16	22	•	•
	36	34814	36×4.0	40	78	100	30	40	68	58	25	148	158	3.0	18	27	•	•

■ 安裝方法 螺絲孔如下圖加工,CHNN/CHNLL的凸緣面和工作物面鎖到密著狀態下使用

訂貨: 品號 交期: 1 天

CHNN10

M	d ₁	P
10	15	22
12	18	26
16	23	32
20	27	40
24	35	50
30	42	60
36	50	72



M	d ₂	P ₁	P ₂
10	12	22	5
12	14	26	6
16	18	32	6
20	22	40	6
24	28	50	8
30	34	60	9
36	40	72	11

